

AURORA[®]
L I G H T I N G

T R A D E



N E W P R O D U C T S



Aurora New Products Catalogue 2024

Aurora is pleased to introduce you to a brand-new catalogue, where we unveil an array of innovative products carefully crafted to elevate Aurora's comprehensive collection.

Commitment to Quality

Our commitment to quality and variety is enhanced through the introduction of these new products which continue to bolster Aurora's portfolio. Catering to a spectrum of sectors, from the nurturing environments of Healthcare and Education to the dynamic landscapes of Commercial and Industrial spaces, the new additions seamlessly integrate with Aurora's existing range.

At Aurora, we understand the importance of reliability. That's why all our products come backed by a 3 or 5-year warranty, with the added assurance of a market-leading 3-year on-site warranty on selected products.



This latest product lineup marks a notable advancement in product development, featuring a variety of innovative designs, enhanced features, and added benefits.

Aurora Lighting - Welwyn Garden City, UK




































We take pride in not only brightening spaces but also in ensuring the longevity and performance of our lighting products.

In a move towards sustainability, and with the aim of cutting maintenance expenses and minimising waste, both the new Filante and Plaisio panels offer the flexibility to replace individual LED modules in case of failure.

Whether you're considering the groundbreaking 185lm/W Cosmos Highbay or the recently unveiled UtiliteXL Wall Pack, specifically crafted to minimise light pollution, Aurora remains at the forefront of innovation.

Visit auroralighting.com for more information.

NEW Product Range Finder

Boutica 6  38W Colour Switchable Adjustable	Apex™ 7  30W CRI90 Adjustable	Prysim™ CS 8  42W Colour Switchable Adjustable	Focus Slim II 11  10-20W Colour & Wattage Switchable	BimPro™ CS 12  32W Colour Switchable
Focus 13  GU10 3-Circuit Spot	Cool II 14  25/35W CRI90	Track & More 15  3-Circuit Track & Accessories	Esa Spot 16  6W Colour Switchable with PIR	Borealis 17  40W Up/Down 400mm Halo
Filante 22  30W UGR16 600x600mm	Plaisio 23  30W UGR16 600x600mm	Duolite™ 24  36W UGR19 600x600mm	Versitile™ 26  30W IP65 600x600mm	Artik 27  45W UGR17 1200x200mm
PrincetonWS™ 29  22-80W UGR19 1200-1800mm	Princeton 30  25W UGR19 1200mm	Princeton 31  25W UGR19 1200mm	Lineo 32  24/30/50W Surface or Suspended	Lineo 33  24/30/50W Surface or Suspended
UtiliteXL™ 37  14-24W IP65 Colour Switchable	Givry 38  E27 IP54 Wall	Givry 39  E27 IP54 Post	Zykos 40  5/8/10W Surface Mounted	Zykos 41  5/8/10W Recessed
Forsythia 42  35W IP65 Post	Fusain 43  25W IP66 Colour Switchable Post	Solis 44  40/60/75/100W IP66 Column		
Cosmos™ 50  80/120/150W IP65 0-10V Dimmable	Sporty 52  200W UGR19 600x420mm	Camus II 54  100/150/300W IP66 Asymmetrical	Song 55  300/400/500/800W IP66 DALI Dim	EmPac™ 56  Emergency Bulkhead
EmPac™ 57  Emergency Twin Spot	Filament Lamp 58  8W E27 GLS Dimmable			

CEILING LIGHTS
6-17

PANELS & LINEARS
22-33

OUTDOOR LIGHTING
37-44

INDUSTRIAL LIGHTING
50-58

Ceiling Lights



FEATURE PRODUCTS



Apex™

CRI90 4000K
Adjustable Wallwasher
3700lm

p7



Prysim™ CS

Colour Switchable
Adjustable Wallwasher
Up to 4300lm

p8



Focus Slim II

Colour & Wattage Switchable
3-Circuit Track Spotlight
Up to 1900lm

p11



Borealis

Single Colour 4000K
Up/Down Halo Light
4000lm

p17

Boutica

Boutica Adjustable 38W Colour Switchable Retail Wallwasher



- Adjustable recessed wallwasher designed to highlight displays and wall features
- Colour switchable between 3000/4000/5700K
- Adjustable rotate and tilt angles to adapt to changing environments
- Producing up to 4115 lumens from 38W LED
- Rotation 330°, adjustment 75°



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium & Polycarbonate
- Diffuser: Opaque Polycarbonate
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Cutout (mm)	Size (mm)	Finish
767440	Non Dim	38	3000/4000/5700	3725-4115	108	90°	160	195 x 135	White
767441	Non Dim	38	3000/4000/5700	3725-4115	108	90°	160	195 x 135	Black

For DALI option please contact Sales.

Apex™ Adjustable 30W Retail Wallwasher



- Adjustable recessed wallwasher designed to highlight displays and wall features
- CRI90 Perfect for applications that require high quality light output
- Adjustable rotate and tilt angles to adapt to changing environments
- Producing up to 3700 lumens from 30W LED
- Rotation 350°, adjustment 35°



Technical Specifications

- Supply Voltage: 200-240 AC
- Lifespan: L80B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium
- Reflector: Aluminium
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Cutout (mm)	Size (mm)	Finish
AU-RSP345W/40	Non Dim	30	4000	3700	123	45°	165	180 x 129	White
AU-RSP345BLK/40	Non Dim	30	4000	3700	123	45°	165	180 x 129	Black
AU-RSP324W/40	Non Dim	30	4000	3700	123	24°	165	180 x 129	White
AU-RSP324BLK/40	Non Dim	30	4000	3700	123	24°	165	180 x 129	Black


For DALI option please contact Sales.

Prysim™ CS

Prysim™CS 42W Colour Switchable IP65 Rectangular Wallwasher



- Adjustable rectangular wallwasher designed to highlight displays and wall features
- CRI90 perfect for applications that require high quality light output
- Colour switchable between 3000/3500/4000K




Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Cutout (mm)	Size (mm)	Finish
EN-WW42CS	Non Dim	42	3000/3500/4000	3900-4300	102	100°	220x130	235 x 145 x 120	White

For DALI option please contact Sales.

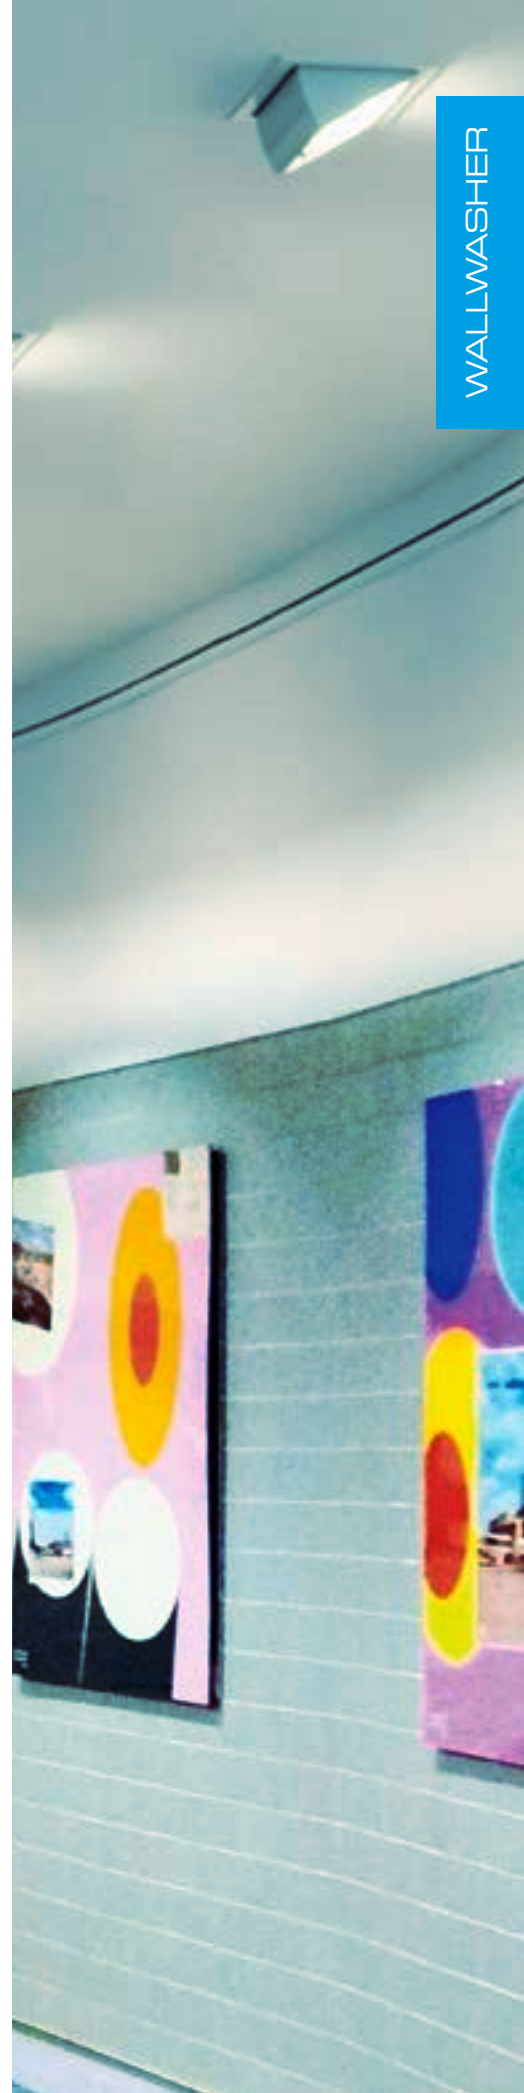

WALLWASHER

Focus Slim II

ULTIMATE DISPLAY LIGHTING FLEXIBILITY
COLOUR & WATTAGE SWITCHABLE

Up to 1900lm



ADJUSTABLE BEAM ANGLE

Focus your track lighting where its needed by simply rotating the shade to fine tune the beam angle between 24°-60°



Colour Switchable
Choose between 2700K, 4000K and 6000K



Wattage Switchable
Select 10W, 15W or 20W prior to installation



Circuit Selection
Switch spotlights between circuit 1, 2 or 3

Focus Slim II

Focus Slim II 10-20W Colour & Wattage Switchable Three Circuit Track Spotlight



- Colour and wattage switchable
- Adjustable beam angle 24° to 60°
- 350° Adjustable rotation & 180° tilt
- Compatible with industry standard Global track



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +40°C
- Body: Aluminium
- Diffuser: Clear PMMA
- Warranty: 3 years


Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
AU-TK3CWSBLK	Non Dim	10/15/20	2700/4000/6000	900-1890	95	24-60°	145 x 70 x 210	Black
AU-TK3CWSW	Non Dim	10/15/20	2700/4000/6000	900-1900	95	24-60°	145 x 70 x 210	White

BimPro™ CS

BimPro™ Colour Switchable 32W Three Circuit Track Spotlight



- Adjustable colour switchable three circuit track spotlight with slimline track adaptor
- Available in 24° and 45° beam angle with LEDs delivering up to 97lm/W.
- Colour switchable between 3000/3500/4000K
- 330° Adjustable rotation & 100° tilt
- SDCM <4



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium
- Diffuser: Clear Glass
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
EN-TK3245CSW	Non Dim	32	3000/3500/4000	2900-3100	97	45°	140 x 96	White
EN-TK3245CSBLK	Non Dim	32	3000/3500/4000	2900-3100	97	45°	140 x 96	Black
EN-TK3224CSW	Non Dim	32	3000/3500/4000	2900-3100	97	24°	140 x 96	White
EN-TK3224CSBLK	Non Dim	32	3000/3500/4000	2900-3100	97	24°	140 x 96	Black

Focus GU10 Three Circuit Adjustable Track Spotlight



- 3-Circuit GU10 track spotlight compatible with industry standard Global track
- Rotation 355°, adjustment 90°
- For use with GU10 lamps - lamp not included



Technical Specifications

- Supply Voltage: 220-240 AC
- Body: Aluminium & Polycarbonate
- Warranty: 2 Years

Cat No.	Type	Watts (W)	Size (mm)	Finish
8370	Non Dim	7W Max	100 x 55	White
8371	Non Dim	7W Max	100 x 55	Black

Cool II

Cool II 25W/35W LED Three Circuit Adjustable Track Spotlight



- 3-Circuit track spotlight with in-track driver compatible with industry standard Global track
- CRI90 offering excellent light quality
- Rotation 355°, adjustment 90°



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B20 30,000hrs
- Operating Temperature: -20°C / +40°C
- Body: Aluminium
- Diffuser: Clear PMMA
- Warranty: 3 Years


Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
100224	Non Dim	25	3000	2750	110	24°	155 x 75	White
100225	Non Dim	25	4000	2500	100	24°	155 x 75	White
100226	Non Dim	35	3000	3500	100	24°	145 x 85	White
100227	Non Dim	35	4000	3850	110	24°	145 x 85	White
100228	Non Dim	25	3000	2500	100	24°	155 x 75	Black
100229	Non Dim	25	4000	2500	100	24°	155 x 75	Black
100230	Non Dim	35	3000	3500	100	24°	145 x 85	Black
100231	Non Dim	35	4000	3500	100	24°	145 x 85	Black

Track & Accessories


Three Circuit Track & Suspension Accessories

Three Circuit Track		Black	White
	1 Metre	XTS410-N	XTS410-W
	2 Metre	XTS420-N	XTS420-W
	3 Metre	XTS430-N	XTS430-W

Three Circuit Floor View From Below

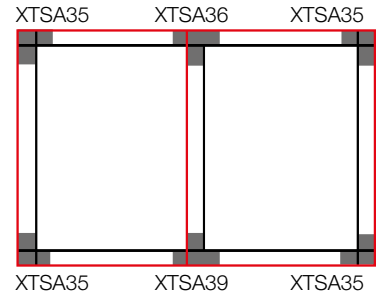

Three Circuit Track Accessories		Black	White
	Live End	XTSA11-N XTSA12-N	XTSA11-W XTSA12-W
	Dead End	XTSA41-N	XTSA41-W
	Straight Connector	XTSA21-N	XTSA21-W
	Flexible Connector	XTSA23-N	XTSA23-W
	L Connector Inside Feed	XTSA34-N	XTSA34-W
	L Connector Outside Feed	XTSA35-N	XTSA35-W
	X Connector	XTSA38-N	XTSA38-W
	T Connector Outside Right	XTSA36-N	XTSA36-W
	T Connector Inside Left	XTSA37-N	XTSA37-W
	T Connector Outside Left	XTSA39-N	XTSA39-W
	T Connector Inside Right	XTSA40-N	XTSA40-W
	Emergency Track Light	AU-EMSTTRACKB AU-EMSTTRACKW	

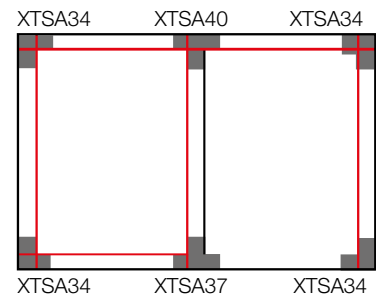



Make the most of our experience - call us now for assistance specifying track systems. Contact Aurora direct for details on 01707 228 700 or email technical@auroralighting.com



Exploded View of Emergency Track Light
 • 6W Maintained • 3.5W Non Maintained
 • 5000K • LiFePO4 Battery

Consider polarity for L and T Connectors and the Live Ends. Blue line shows polarity.


Track Suspension Three Circuit	Length	Aluminium	Black	White
		SKB16-A	SKB16-N	SKB16-W
	Adjustable Suspension Wire Kit 2 or 5m	5m 791-0025B 2m 791-0026B		



Three Circuit Track Suspension Kit

Esa Spot

Esa Spot Fixed 6W Colour Switchable Downlight With PIR

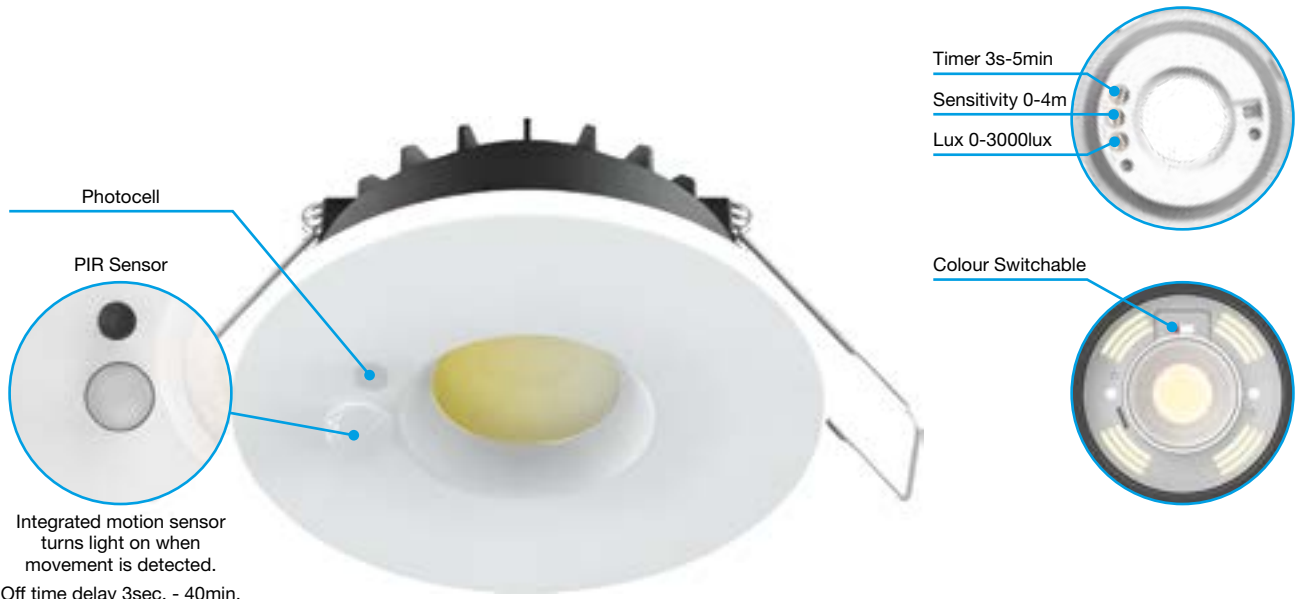

Integrated motion sensor turns light on when movement is detected. Off time delay 3sec. - 40min.

- + Adjustable PIR sensor with photocell for added control and energy savings
- Colour switchable between 2700/3000/4000K
- Suitable for use in bathrooms, corridors, storage cupboards etc.



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B10 50,000 hrs
- Operating Temperature: -20°C / +40°C
- Body: Aluminium & Polycarbonate
- Diffuser: Clear Polycarbonate
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Cutout (mm)	Size (mm)	Finish
100619	Dim	6	2700/3000/4000	510-560	93	50°	68	88 x 43	White
100620	Dim	6	2700/3000/4000	510-560	93	50°	68	88 x 43	Black

Borealis 40W Up/Down 400mm Halo Light



- Architectural luminaire for installation in entrance halls, interior corridors, commercial and residential areas
- Direct and indirect lighting providing a halo effect on the mounting surface
- Can be surface, suspended or rod mounted
- Loop-in loop-out 3-pole connectors, replaceable driver



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B10 50,000hrs
- Operating Temperature: -15°C / +35°C
- Body: Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
300338	Non Dim	40	4000	4000	100	120°	400 x 86	Black
302642	DALI	40	4000	4000	100	120°	400 x 86	Black
300344	BOREALIS Suspension Kit for 300338						800	-
300345	BOREALIS Suspension Rod for 300338						500	-

LED Panels & Linears



FEATURE PRODUCTS



Filante

UGR16
DALI Dimmable Panel
4200lm

p22



VersiTile™

Single Colour 4000K
IP65 Panel
3900lm

p26



Princeton

UGR19 School Fitting
Asymmetrical
4300lm

p30



Lineo

Single Colour 4000K
Linear
Up to 5000lm

p32

Filante + Plaisio

BETTER FOR THE ENVIRONMENT
MORE COMFORTABLE WORKSPACES

Up to 4200lm



REPLACEABLE MODULES

Individually replaceable modules,
reducing maintenance costs

UGR<16

Perfect for technical drawing,
classrooms, boardrooms, meeting
rooms and commercial environments



Flicker-Free Drivers
DALI-2 & DALI Push
drivers with push terminals



Lightweight & Slim
Filante is lightweight and
just 18mm thick

CIRCULAR ECONOMY



Modular lighting fixtures can be designed with components that are easily replaceable and made of recyclable parts, such as drivers, controls, and LED boards.


This means that when a component fails or reaches the end of its lifetime, it can be replaced without having to dispose of the entire fitting, thus extending the useful lifespan of the luminaire beyond that of its parts.

By creating modular lighting fixtures that are serviceable and intelligent, we can reduce waste and increase the lifespan of lighting products, thus contributing to a more sustainable and circular economy.


SUSTAINABLE
EFFICIENT
COMFORT

Filante

Filante 30W LED 600 x 600mm UGR16 DALI Panel

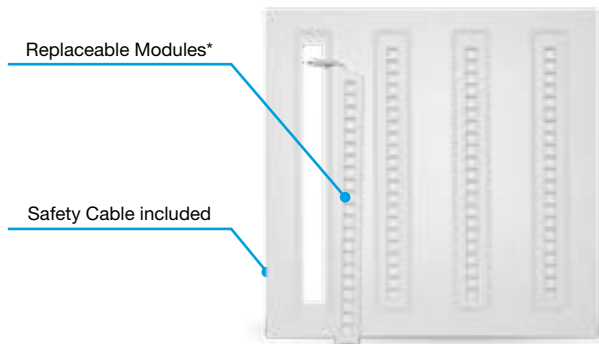

- + Individually replaceable LED modules, reducing maintenance costs
- UGR16 offering reduced glare for office and education environments
- DALI-2 dimmable
- Loop-in loop-out driver



Technical Specifications


- Supply Voltage: 220-240 AC
- Lifespan: L90B10 50,000hrs
- Operating Temperature: -25°C / +40°C
- Body: Aluminium
- Diffuser: Clear Polycarbonate
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
100749	DALI-2	30	4000	4200	140	80°	595 x 595 x 18	White

For **Emergency** option please contact Sales.


*In the unlikely event that you should need replacement modules, please contact Sales.

Plaisio 30W 600 x 600mm UGR16 4000K DALI Panels

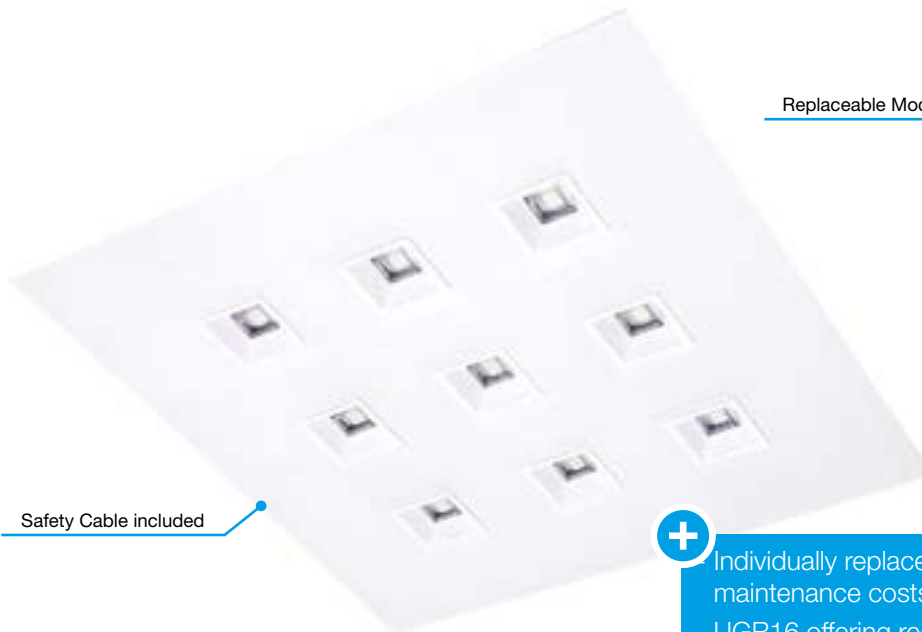


Safety Cable included

Replaceable Modules*

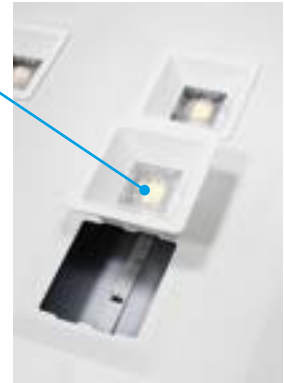

Individually replaceable LED modules, reducing maintenance costs

- UGR16 offering reduced glare for office and education environments
- DALI-2 dimmable
- Loop-in loop-out driver



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L90B10 50,000hrs
- Operating Temperature: -15°C / +35°C
- Body: Steel & Polycarbonate
- Diffuser: Clear Polycarbonate
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
302444	DALI-2	30	4000	4200	140	85°	595 x 595 x 25	White
302607	DALI-2	30	4000	3900	130	80°	595 x 595 x 25	Black

For **Emergency** option please contact Sales.

*In the unlikely event that you should need replacement modules, please contact Sales.

DuoLite™

DuoLite™ 36W 600 x 600mm UGR19 Troffer



A unique LED troffer that uses back-lit technology to replicate the appearance of traditional direct/indirect luminaires

- UGR19 offering reduced glare for office environments
- Ideal for a wide range of commercial applications, including schools and offices



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B50 50,000hrs
- Operating Temperature: -10°C / +40°C
- Body: Aluminium
- Diffuser: Opaque Prismatic
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
AU-TF6060/40	Non Dim	36	4000	3700	102	90°	595 x 595 x 40	White
AU-TF6060V/40	1-10V Dim	36	4000	3700	102	90°	595 x 595 x 40	White
AU-TF6060DA/40	DALI-2	36	4000	3700	102	90°	595 x 595 x 40	White
EN-DLEM5	Emergency Pack							



VersiTile™

VersiTile™ 30W 600 x 600mm IP65 Panel



- IP65 front – suitable for use in commercial kitchens, healthcare and similar environments
- Edge-lit design provides superior light performance and uniformity, ideal for offices and commercial lighting
- High transmission diffuser drastically reduces uncomfortable glare
- Tp(a) Rated



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B50 50,000hrs
- Operating Temperature: -10°C / +40°C
- Body: Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
AU-LP65A/40	Non Dim	30	4000	3900	130	120°	595 x 595 x 11	White
AU-LP65ADA/40	DALI-2	30	4000	3900	130	120°	595 x 595 x 11	White
AU-LP65AV/40	1-10V Dim	30	4000	3900	130	120°	595 x 595 x 11	White
AU-EM1EX	3 Hour Maintained Emergency Pack for Panels						47 x 260 x 30	-

Artik 45W LED 1200x200mm UGR17 Suspended Up/Down Panel Light



- Suspended fitting with up and down illumination for offices, showrooms, schools etc.
- UGR17 offering reduced glare
- Loop-in loop-out connectors



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B50 80,000hrs
- Operating Temperature: -15°C / +35°C
- Body: Aluminium
- Diffuser: Prismatic PMMA
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
300232	Non Dim	45	4000	5300	117	120°	1210 x 200 x 37	RAL9006
300231	DALI-2	45	4000	5300	117	120°	1210 x 200 x 37	RAL9006

WATTAGE SWITCHABLE LINEAR SCHOOL FITTING

ERP COMPLIANT • CAN BE USED TO ACHIEVE UGR
UGR 19
(UNIFIED GLARE RATING)

**PLUG
+PLAY**


120lm/W

- ENHANCED VISUAL COMFORT
- INCREASED PRODUCTIVITY & FOCUS
- OPTIMISED LEARNING ATMOSPHERE
- 50% ENERGY SAVINGS OVER FLUORESCENT


MODULAR PLUG + PLAY SOLUTION

Simply adapt the standard PrincetonWS on site by installing the Emergency and/or Microwave Sensor Modules to create an EM, MSC or EMMSC fitting.


Perfect for the wholesaler to control stock levels and store less products, whilst being able to offer a full range to the contractor.

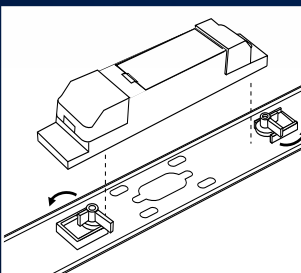

**Emergency Pack
Installation**

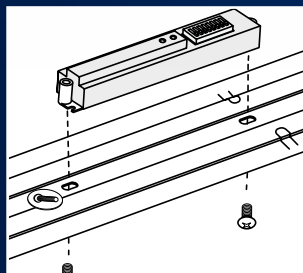

**Microwave Sensor
Installation**

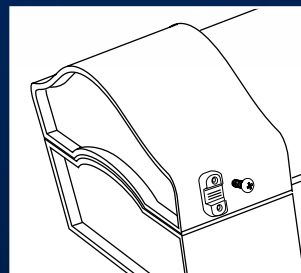

**Lockable
Diffuser**

Wattage Switchable Modular Linear School Fitting



- Suitable for use in education and healthcare environments
- Wattage switchable LED linear in 3 lengths
- UGR19 offering reduced glare
- Robust design with lockable diffuser
- Multiple BESA mounting points
- Fast and easy installation with push terminals



22W	34W	50W
28W	43W	60W
34W	52W	70W
40W	60W	80W
<small>AU-SF1200WS</small>	<small>AU-SF1500WS</small>	<small>AU-SF1800WS</small>



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70 50,000hrs
- Operating Temperature: -15°C / +45°C
- Body: Steel Housing
- Diffuser: Microprismatic Polycarbonate
- Warranty: 5 years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
AU-SF1200WS/40	Non Dim	22 / 28 / 34 / 40W	4000	Up to 4800	120	80°	1200 x 180 x 85	White
AU-SF1500WS/40	Non Dim	34 / 43 / 52 / 60W	4000	Up to 7200	120	80°	1500 x 180 x 85	White
AU-SF1800WS/40	Non Dim	50 / 60 / 70 / 80W	4000	Up to 8950	120	80°	1800 x 180 x 85	White
AU-EM2	Emergency Pack for PrincetonWS™							
AU-EM2ST	Emergency Self Test Pack for PrincetonWS™							
AU-SF1MSC	Microwave Sensor Corridor Function Pack for PrincetonWS™							

*Add suffix **DA** for DALI or **V** for 1-10V dimmable options

Princeton

Princeton 25W UGR19 1200mm Asymmetrical Cornice Linear



- Suitable for use in education and healthcare environments
- UGR19 offering reduced glare
- Asymmetrical light output



Technical Specifications

- Supply Voltage: 200-240 AC
- Lifespan: L80B50 50,000hrs
- Operating Temperature: -20°C / +40°C
- Body: Polycarbonate & Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
100105	Non Dim	25	4000	4300	172	110°	1225 x 95 x 90	White

For **DALI** option please contact Sales.

Princeton 25W UGR19 1200mm Asymmetrical Linear



Suitable for use in education and healthcare environments

- UGR19 offering reduced glare
- Asymmetrical light output



Technical Specifications

- Supply Voltage: 200-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +40°C
- Body: Polycarbonate & Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
100106	Non Dim	25	4000	3700	148	110°	1250 x 245 x 90	White

For DALI option please contact Sales.

Lineo

Lineo Surface or Suspended Linear



- High quality extruded aluminium body
- May be surface mounted or suspended
- Suspension kit included



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium
- Diffuser: Prismatic Polycarbonate
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
75756	Non Dim	24	4000	3000	125	60°	600 x 63 x 78	Aluminium
75757	Non Dim	30	4000	3600	120	60°	1200 x 63 x 78	Aluminium

Lineo Surface or Suspended UGR19 Linear



Polycarbonate Reflector



UGR19 offering reduced glare for office environments

- High quality extruded aluminium body
- Can be surface mounted or suspended
- Suspension kit included



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium
- Polycarbonate Reflector
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
75758	Non Dim	24	4000	3000	125	60°	600 x 50 x 70	Black
75759	Non Dim	30	4000	3600	120	60°	1200 x 50 x 70	Black
100156	Non Dim	50	4000	5000	100	60°	1430 x 50 x 70	Black
100502	DALI-2	30	4000	3600	120	60°	1200 x 50 x 70	Black
100523	DALI-2	50	4000	5000	100	60°	1430 x 50 x 70	Black

Outdoor Lighting



FEATURE PRODUCTS



UtiliteXL™

Colour & Wattage Switchable
IP65 Wall Pack
Up to 3150lm

p37



Givry

E27 Wall Lantern
IP54 Rated
Max. Lamp Wattage 18W

p38-39



Fusain

Colour Switchable
IP66 Post Light
Up to 2500lm

p43



Solis

Single Colour 2700K
Column Head
Up to 13000lm

p44

VERSATILE & EASY TO INSTALL COLOUR & WATTAGE SWITCHABLE

Up to 3150lm



MULTIPLE CABLE ENTRIES

Cable and conduit entry points at the rear, side and top for ease of installation



Colour Switchable
Choose between 3000K, 4000K and 6500K



Wattage Switchable
Select 14W, 17W, 21W or 24W prior to installation



Photocell Option
Automatically turn lights on only when needed

UtiliteXL™ 14W-24W IP65 Colour & Wattage Switchable Wall Pack



- Colour & wattage switchable LED wall pack
- Suitable for external security and perimeter lighting
- Photocell version plus plug and play emergency pack available
- Rear, side and top cable or conduit entries



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Polycarbonate
- Diffuser: Opaque Polycarbonate
- Warranty: 5 years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
AU-WP103CWS	Non Dim	14/17/21/24	3000/4000/6500	1700-3150	131	120°	309 x 162 x 217	Black
AU-WP103CWSPH	Photocell	14/17/21/24	3000/3000/6500	1700-3150	131	120°	309 x 162 x 217	Black
AU-EM4	Emergency Pack for UtiliteXL™							

Givry IP54 E27 Wall Lantern



- Contemporary design
- Create a warm atmosphere within your home or garden
- Ideal for use with a wide range of E27 lamps



Technical Specifications

- Supply Voltage: 220-240 AC
- Body: Aluminium & Polycarbonate
- Diffuser: Clear Glass
- Warranty: 3 years

Cat No.	Type	Watts (W)	Size (mm)	Finish
100483	E27	Max 18W	108 x 108 x 336	Graphite

Givry IP54 E27 Post Lantern

+



E27 LAMPS
THE PERFECT MATCH

GLS Filament Lamps
See p58




- Contemporary design
- Create a warm atmosphere within your home or garden
- Ideal for use with a wide range of E27 lamps



Technical Specifications

- Supply Voltage: 220-240 AC
- Body: Aluminium & Polycarbonate
- Diffuser: Clear Glass
- Warranty: 3 years

Cat No.	Type	Watts (W)	Size (mm)	Finish
100484	E27	Max 18W	108 x 108 x 240	Graphite

Zykos Surface Mounted IP65 Wall Lights



+ Surface mount low level floor washer for use in entrance halls, corridors, stairways etc.
 - 60° asymmetric beam angle
 - IK09 rated for use in harsh outdoor environments



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B10 50,000hrs
- Operating Temperature: -15°C / +30°C30
- Body: Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish	Shape
301814	Non Dim	5	2900	220	44	60°	114 x 37	Black	Round
301815	Non Dim	8	2900	400	50	60°	180 x 35	Black	Round
301816	Non Dim	5	2900	220	44	60°	114 x 114 x 37	Black	Square
301817	Non Dim	8	2900	400	50	60°	180 x 180 x 35	Black	Square
301818	Non Dim	5	2900	220	44	60°	180 x 114 x 35	Black	Rectangular
301819	Non Dim	10	2900	500	50	60°	250 x 114 x 35	Black	Rectangular

Zykos Recessed Mounted IP65 Wall Lights



Recess mount low level floor washer for use in entrance halls, corridors, stairways etc.

- 60° asymmetric beam angle
- IK09 rated for use in harsh outdoor environments



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B10 50,000hrs
- Operating Temperature: -15°C / +30°C
- Body: Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Cutout (mm)	Size (mm)	Finish	Shape
301820	Non Dim	5	2900	220	44	60°	130	135 x 78	Black	Round
301821	Non Dim	8	2900	400	50	60°	196	196 x 78	Black	Round
301822	Non Dim	5	2900	220	44	60°	130x130	136 x 136 x 78	Black	Square
301823	Non Dim	8	2900	400	50	60°	195x195	201 x 201 x 78	Black	Square
301824	Non Dim	5	2900	220	44	60°	196x130	196 x 130 x 78	Black	Rectangular
301825	Non Dim	10	2900	500	50	60°	266x130	271 x 135 x 78	Black	Rectangular

Forsythia

Forsythia 35W IP65 Post Light



Suitable for residential and commercial applications

- Illuminate walkways, parking areas, and other outdoor spaces
- Ideal for highlighting landscaping or architectural features



Technical Specifications

- Supply Voltage: 100-240 AC
- Lifespan: L80B10 30,000hrs
- Operating Temperature: -20°C / +45°C
- Body: Aluminium
- Diffuser: Clear Polycarbonate
- Warranty: 2 Years


Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
70806	Non Dim	35	3000	2800	80	150°	167 x 1018	Graphite
70807	Non Dim	35	4000	3150	90	150°	167 x 1018	Graphite

Fusain 25W IP66 Colour Switchable Post Light



Suitable for residential and commercial applications

- Colour switchable between 3000/4000/5000K
- Ideal for highlighting landscaping or architectural features



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 50,000hrs
- Operating Temperature: -30°C / +45°C
- Body: Aluminium, Polycarbonate
- Diffuser: Clear Polycarbonate
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
100343	Non Dim	25	3000/4000/5000	2300-2500	100	150°	133 x 200 x 975	Black
100342	Non Dim	25	3000/4000/5000	2300-2500	100	150°	133 x 200 x 475	Black

Solis

Solis Asymmetrical IP66 Column Head



- +** Asymmetrical beam ideal for commercial applications, car parks & roads
- ZHAGA base connection
- Complies with light pollution directive (ULOR 0% 2700K)
- 500 Hours salt spray tested



Technical Specifications

- Supply Voltage: 120-277 AC
- Lifespan: L80B10 100,000hrs
- Operating Temperature: -20°C / +50°C
- Body: Aluminium
- Diffuser: Clear Polycarbonate
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Post Diameter (mm)	Size (mm)	Finish
302512	Non Dim	40	2700	5200	130	Asymmetric	60	476 x 410	Anthracite
302513	Non Dim	60	2700	7800	130	Asymmetric	60	476 x 410	Anthracite
302514	Non Dim	75	2700	9750	130	Asymmetric	60	476 x 410	Anthracite
302515	Non Dim	100	2700	13000	130	Asymmetric	60	476 x 410	Anthracite



Industrial Lighting



FEATURE PRODUCTS



Cosmos™

Single Colour 4000K
0-10V Dimmable Highbay
Up to 27750lm

p50-51



Sporty

Single Colour 4000K
UGR19 Lowbay
28000lm

p52



Camus II

Asymmetrical
IP66 Floodlight
Up to 40500lm

p54



EmPac™

Emergency Bulkhead
Manual & Self Test
Up to 250lm

p56

MARKET LEADING EFFICIENCY 185LM/W PLUG & PLAY ACCESSORIES

Up to 27750lm



CHANGEABLE LENSES


The Cosmos™ highbay has a 110° beam angle as standard, but with the option of user-replaceable 60° and 90° lenses (sold separately)

MICROWAVE OR PIR SENSORS


The range also comes with ZHAGA plug-in microwave and PIR sensors and is 0-10V dimmable for added control




Example Sensor Installation

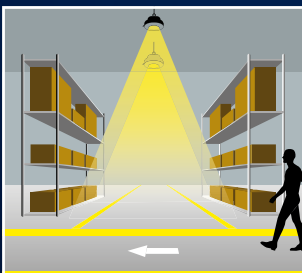

Motion Detected
Lighting comes on at 100%

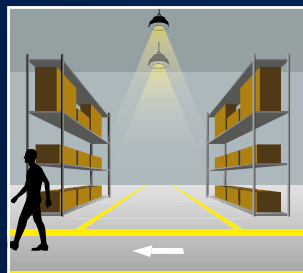

After Hold Time
Lighting dims if no further movement is detected

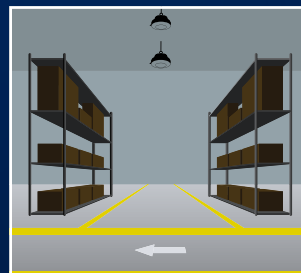


After Standby Period
Lighting switches off if no motion is detected

CLASS B ENERGY RATED



The 185lm/W Cosmos™ highbay range is a highly efficient lighting solution that delivers the same lumens as traditional 100/150/200W highbays for up to 25% less power.

This means that you can replace a traditional 100W highbay with an 80W Cosmos, 150W with 120W and 200W with 150W.



Up to 15m Detection Range

Microwave sensor option provides detection range of 15m (PIR 12m) and 108°



0-10V Dimmable

A consistent form of dimming down to 10% of the product's output, all the way up to 100%



PIR & Microwave Sensors

The Cosmos highbay range also comes with ZHAGA plug-in microwave and PIR sensors and is 0-10V dimmable for added control




Microwave Sensing Control

A single remote can program multiple units together for an energy saving solution with the microwave sensor Cosmos™

Cosmos™

Cosmos™ 80/120/150W IP65 0-10V Dimmable Highbay

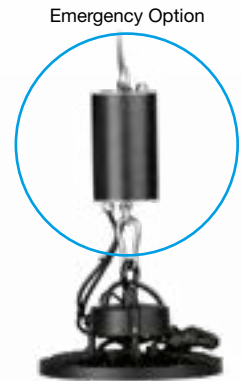

- Highly efficient 185lm/W delivering the same lumens as traditional 100/150/200W highbays for up to 25% less power
- With 0-10V dimmable driver
- Available in 4000K & 6500K



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B10 50,000hrs
- Operating Temperature: -40°C / +50°C
- Body: Aluminium
- Diffuser: Opaque Polycarbonate
- Warranty: 5 years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
AU-HBD80/40	0-10V Dim	80	4000*	14800	185	110°	245 x 115	Black
AU-HBD120/40	0-10V Dim	120	4000*	22200	185	110°	266 x 120	Black
AU-HBD150/40	0-10V Dim	150	4000*	27750	185	110°	266 x 120	Black
AU-HBD80EM/40	Emergency	80	4000*	14800	185	110°	245 x 115	Black
AU-HBD120EM/40	Emergency	120	4000*	22200	185	110°	266 x 120	Black
AU-HBD150EM/40	Emergency	150	4000*	27750	185	110°	266 x 120	Black

*For 6500K option please contact Sales.

Cosmos™ Dimmable Highbay Accessories



AU-HBD60A / AU-HBD60B 60° Lens
AU-HBD90A / AU-HBD90B 90° Lens



AU-HBDPIR PIR Sensor
AU-HBDMSC Microwave Sensor
AU-HBDRC Remote for Sensor



AU-HBDMB
Surface Mounting Bracket



- ZHAGA base for plug in microwave or PIR sensors
- Optional changeable 60° and 90° lenses

Cat No.	Description
AU-HBD90A	90° Lens for Cosmos™ AU-HBD80
AU-HBD90B	90° Lens for Cosmos™ AU-HBD120 & AU-HBD150
AU-HBD60A	60° Lens for Cosmos™ AU-HBD80
AU-HBD60B	60° Lens for Cosmos™ AU-HBD120 & AU-HBD150
AU-HBDMB	Mounting Bracket for Cosmos™
AU-HBDPIR	PIR Sensor for Cosmos™
AU-HBDMSC	Microwave Sensor for Cosmos™
AU-HBDRC	Remote Controller for AU-HBDMSC Microwave Sensor

Sporty

Sporty 200W 600 x 420mm UGR19 Lowbay



- Lowbay fittings for industrial and sports lighting
- UGR19 for reduced glare
- Includes suspension kit



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 30,000hrs
- Operating Temperature: -25°C / +45°C
- Body: Aluminium & Polycarbonate
- Diffuser: Opaque Polycarbonate
- Warranty: 2 Years

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
800107	Non Dim	200	4000	28000	140	90°	600 x 420 x 52	White



Camus II

Camus II Asymmetrical IP66 Floodlight



- Asymmetric beam angle to minimise unwanted light pollution, ideal for industrial and commercial environments
- Supplied with 1.5m H05RNF 3G1 Cable + IP68 16A Connector
- Heat tempered glass lens



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L80B10 50,000hrs
- Operating Temperature: -25°C / +45°C
- Body: Aluminium
- Diffuser: Clear Glass
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
302222	Non Dim	100	4000	13500	135	Asymmetric	315 x 245 x 57	Black
302411	Non Dim	150	4000	20250	135	Asymmetric	365 x 290 x 57	Black
302412	Non Dim	200	4000	27000	135	Asymmetric	421 x 379 x 57	Black
302413	Non Dim	300	4000	40500	135	Asymmetric	530 x 444 x 60	Black

Song IP66 DALI Floodlight



High power wattage to illuminate larger spaces ideal for sports Facilities, industrial and commercial environments

- DALI Dimmable
- Supplied with IP68 connector




Technical Specifications


- Supply Voltage: 100-277 AC
- Lifespan: L80B50 80,000hrs
- Operating Temperature: -35°C / +45°C
- Body: Aluminium
- Diffuser: Opaque PMMA
- Warranty: 5 Years (3 Years On-Site)

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
301604	DALI Dim	300	5000	42000	140	60°	599 x 283 x 130	Black
301610	DALI Dim	400	5000	56000	140	60°	599 x 360 x 130	Black
301615	DALI Dim	500	5000	60000	120	60°	599 x 360 x 130	Black
302418	DALI Dim	800	5000	112000	140	60°	599 x 720 x 130	Black

3W IP65 Emergency Bulkhead

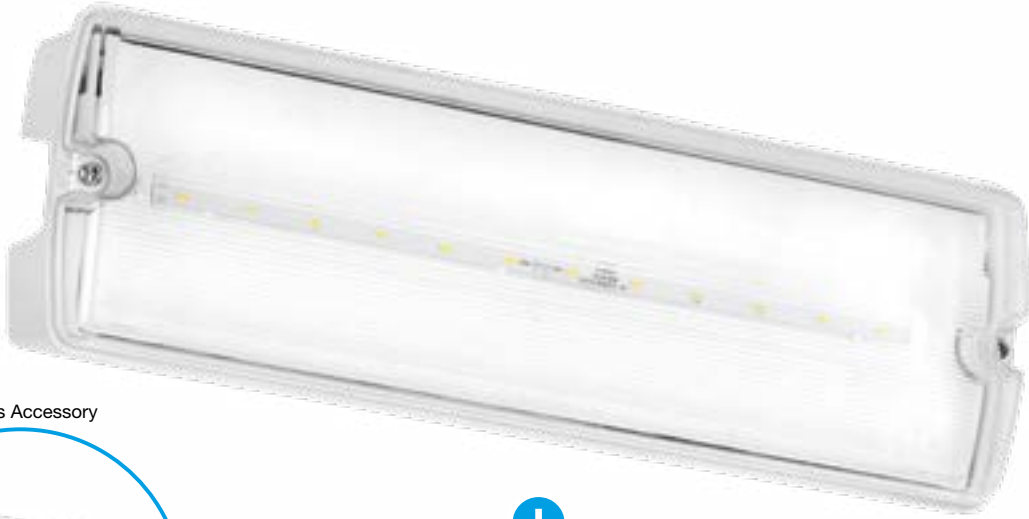

Recess Accessory

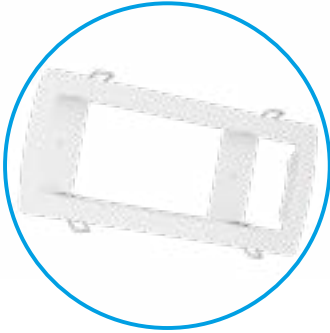

- 3 Hours emergency backup duration with LifePO4 battery
- Can be maintained or non-maintained dependent on connection of switched live
- ISO standard emergency legends included: Up, Down, Left and Right



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B20 25,000hrs
- Operating Temperature: -5°C / +40°C
- Body: Polycarbonate
- Diffuser: Clear Polycarbonate
- Warranty: 5 years

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Cutout (mm)	Size (mm)	Finish
EN-EMBH	Manual Test	3	6500	250	83	120°	-	352 x 59 x 110	White
EN-EMBHST	Self Test	3	6500	250	83	120°	-	352 x 59 x 110	White
AU-EMBHRK	Emergency Bulkhead Recess Accessory						350 x 125	393 x 40 x 150	White

3W or 5W IP65 Emergency Twin Spot



- 3 Hours emergency backup duration with LifePO4 battery
- Can be maintained or non-maintained dependent on connection of switched live
- Twin spot heads have a horizontal adjustable of 180° and a vertical adjustment of 70°



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 25,000hrs
- Operating Temperature: -5°C / +40°C
- Body: Polycarbonate
- Diffuser: Clear Polycarbonate
- Warranty: 5 years

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Size (mm)	Finish
EN-EMTS	Manual Test	3 (2x1.5)	6500	400	133	120°	300 x 47 x 290	White
EN-EMTSST	Self Test	5 (2x2.5)	6500	400	80	120°	300 x 47 x 290	White

Filament Lamp

8W GLS E27 Dimmable Filament Lamp



- Ideal for decorative light fittings, outdoor lanterns etc.
- Triac dimmable
- Golden finish option available



Technical Specifications

- Supply Voltage: 220-240 AC
- Lifespan: L70B50 30,000hrs
- Operating Temperature: -25°C / +45°C
- Body: Aluminium
- Diffuser: Clear/Golden Glass
- Warranty: 2 Years

Cat No.	Type	Watts (W)	Colour Temp. (K)	Lumens (lm)	Lm/W	Beam	Base	Size (mm)	Finish
71461	Dim	8	2700	806	100	300°	E27	60 x 110	Clear
100003	Dim	8	2700	720	90	300°	E27	60 x 108	Golden

THE BENEFITS OF AURORA

3
YEAR
ON-SITE
WARRANTY

NEW MARKET-LEADING
ON-SITE WARRANTY

Aurora offers a 3-year on-site warranty, ensuring the longevity and reliability of our products, so you can buy from us with confidence.

This is safer for you than products supplied by a third-party agent or distributor and gives you the peace of mind that the equipment is properly designed,










constructed and tested to meet the demands of long running hours.

Warranty is increasingly more important now LED is more widely used. This is because there is no longer a replaceable lamp, so in the event of failure the whole unit will need to be replaced.

This will be at your own cost if you don't have a credible warranty from a reliable manufacturer.

This is why we believe that it is only fair that we stand by the LED life potential promises with an honourable warranty.

ON-SITE WARRANTY IS AVAILABLE ACROSS OUR ALL-NEW PRODUCT RANGES:

	Boutica		Filante		PrincetonWS		Zykos
	Apex™		Plaisio		Princeton		Fusain
	Prysim™ CS		Duolite™		Princeton		Solis
	BimPro™ CS		Versitile™		Lineo		Cosmos™
	Esa Spot		Artik		Lineo		Camus II
	Borealis				UtiliteXL™		Song

AURORA[®]
L I G H T I N G

T R A D E

Head Office & Distribution

6 Little Burrow, Burrowfield
Welwyn Garden City
AL7 4SW
United Kingdom

Tel: 01707 228 700

Fax: 0800 8030 519



SCAN
TO VISIT

auroralighting.com

A **G**alaeed Group Company

AURORA
LIGHTING


ELECTRA


**EURO
POLE**


HOP
lights

MIIDEX
LIGHTING