




CHIC

ARCHITECTURAL LIGHTING



Presented By

AURORA[®]

The logo for EUROPOLE, featuring the word "EURO" stacked above "POLE" in a bold, sans-serif font, centered within a white square.

EURO
POLE

Presented By

AURORA[®]

Welcome to the world of **Europole Lighting**,
where innovation meets heritage.

As we make our entrance into the UK market, in partnership
with **Aurora Lighting**, we bring an established legacy and a
future of possibilities.

For nearly three decades, Europole has illuminated spaces
with lighting, evolving with the times to embrace LED
technology. Our commitment to product development is
unwavering, as we continue to craft lighting solutions that not
only brighten but transform environments.

Our roots in the **Galaed Group** since 1989 have been marked
by a commitment to excellence and quality. Now, we're thrilled
to enhance **Aurora Lighting's** portfolio with our architectural
specification lighting products.

From the clean lines of contemporary style to the timeless
allure of classic elegance, our fixtures are crafted specifically
for the high-end residential and hospitality sectors.

At Europole, passion fuels our craft. It's the driving force
behind our research and development team's quest to
materialise your visions. We're dedicated to continuous
development, enhancing our existing collection, and
introducing new designs that capture your imagination.

Join us as we embark on this journey, where each product
design is a reflection of our heritage, and every innovation is a
step towards a brighter future.

With **Europole Lighting**, experience the art of illumination.

All product specifications at the time of printing of this catalogue are subject to change without notice.
Although we try to ensure that colour representation is accurate, you should be aware that the photographic and printing process can sometimes alter colours.

2023 All copyrights in this catalogue are the property of EUROPOLE. Any copy, borrowing, public representation, distribution, transmission, issuance of this catalogue in whole or in part, is strictly prohibited and could result in civil liability and legal proceedings.

Photographic credits: ©Patrick Leclerc - Camille Moirenc - Jean-Luc Mège - Adrien Vier - 123RF - Klus - iStock - Adobe Stock - fotolia - EUROPOLE - Non-contractual photographs.

| | | | |
|---|---|----------------------------------|----|
|  | INTERIOR RECESSED & FIRE RATED | 06 08 12 13 14 15 | 06 |
|  | CEILING & TRACK LIGHTS | 20 22 24 26 | 20 |
|  | SURFACE LIGHTING | 30 32 | 30 |
|  | PENDANTS & FLOORWASHERS | 36 38 40 42 44 | 36 |
|  | LED STRIP | 48 51 52 54 55 | 48 |
|  | OUTDOOR RECESSED & SPOT LIGHTS | 60 66 | 60 |
|  | OUTDOOR WALL & FLOODLIGHTS | 74 76 78 80 | 74 |





■ INTERIOR RECESSED & FIRE RATED

| | |
|---|----|
| Universal Colour Switchable | 06 |
| Universal Colour Switchable Pro & DALI | 08 |
| Single Colour Fire Rated | 12 |
| Colour Switchable Fire Rated | 13 |
| Colour & Wattage Switchable Fire Rated | 14 |
| Colour & Wattage Switchable Fire Rated Adjustable | 15 |

Choose driver technology

SWITCH 6W

via colour switch
on driver



- ✗ 3 colour temperatures in 1 product
 - 2700K ● 3000K ● 4000K

PRO 9.5W

via colour switch
on downlight



- ✗ 4 colour temperatures in 1 product
 - 2700K ● 3000K ● 3500K ● 4000K

PRO DALI 9.5W

via driver



- ✗ Tuneable White
 - 2700K-6500K

Choose bezel options

LED'UP UNIVERSAL

FIXED




ADJUSTABLE



LED'UP UNIVERSAL BAFFLED & WALLWASHER



LED'UP UNIVERSAL BAFFLED & WALLWASHER 2 TONE

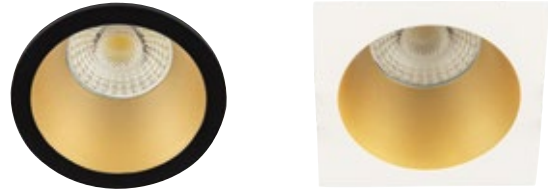


FIXED



ADJUSTABLE



BAFFLED

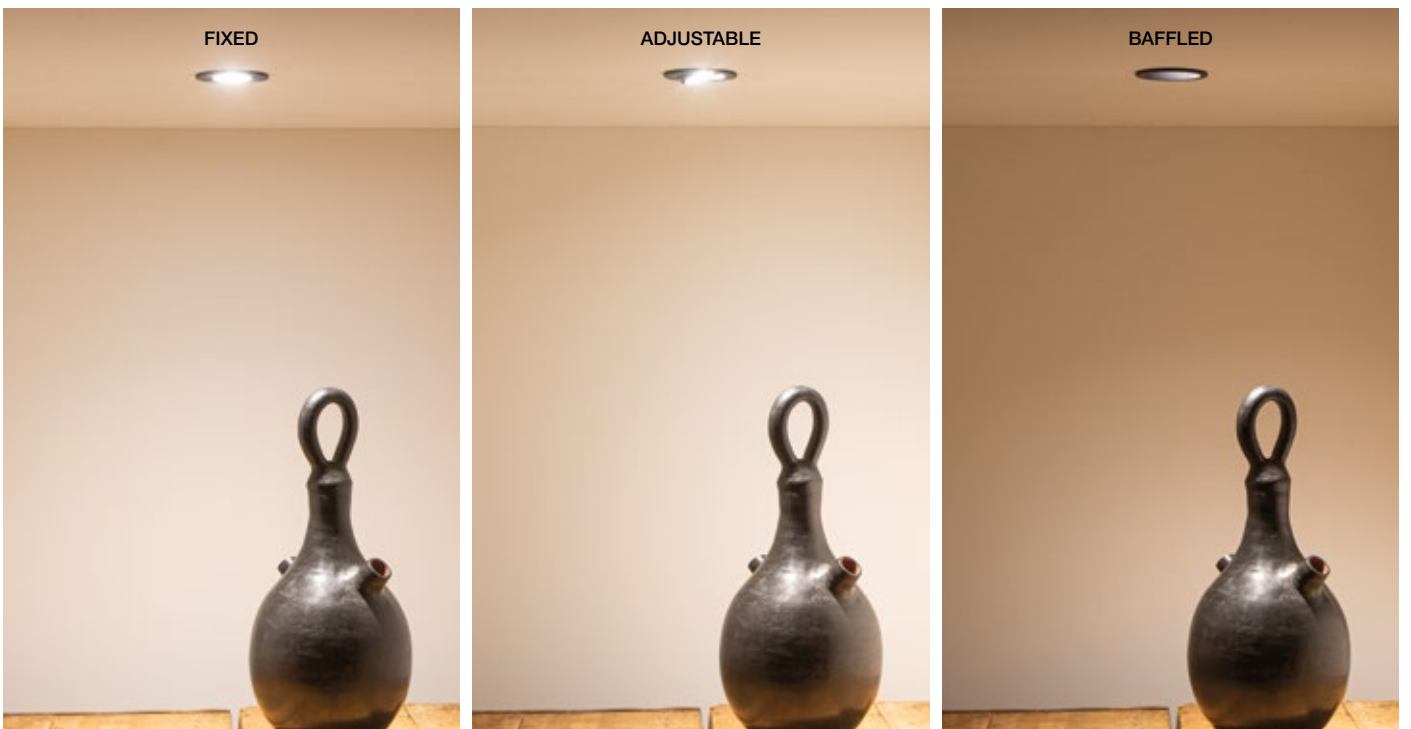

Choose the finish

The LED'UP UNIVERSAL bezel is matt white & round as standard. Other finishes can be selected from the options below to suit your chosen design aesthetic.

LED'UP UNIVERSAL



Matt White



Brushed Aluminium



Matt Black



Satin Gold

With adjustable versions, you can also mix colours



LED'UP UNIVERSAL BAFFLED & WALLWASHER



Matt White



Lacquered Aluminium




Matt Black



Satin Gold

LED'UP UNIVERSAL BAFFLED & WALLWASHER 2 TONE



Matt White /
Matt Black




Matt White /
Lacquered Aluminium



Matt White /
Satin Gold



Matt Black /
Satin Gold



Matt Black /
Copper

Affix the bezel

FIXED



Affix the bezel by
making a 1/4 turn

ADJUSTABLE



Affix the interior flange by
making a 1/4 turn



Affix the bezel by
making a 1/4 turn

Renovate

ADJUSTABLE COVER RING

This covering ring is compatible with the adjustable LED'UP UNIVERSAL.

With an outer diameter of 100mm, the ring allows you to replace previous larger luminaires with your choice from the LED'UP UNIVERSAL range.



LED'UP

LED'UP UNIVERSAL SWITCH

FIXED OR
ADJUSTABLE




ROUND OR
SQUARE



BAFFLED OR
WALLWASHER



9 FINISHES




TWIST & LOCK BEZELS
AND RENOVATION
COVER RING



COMPATIBLE WITH BLOWN
OR ROLLED INSULATION

SLIM - 40mm

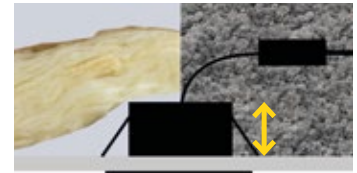

QUICK CONNECTION
TERMINAL BLOCK

FROM 500lm
TO 600lm

60° DICHROIC
OPTIC



3 CCT SWITCH
ON DRIVER





LED'UP UNIVERSAL SWITCH

Power/voltage: 230VAC

Dimming type: TRIAC dimming

Material: Aluminium

Lens material: Polycarbonate

Environmental resistance: White and matt black versions: salt spray tested to 750h

Quick connection: Terminal block


Operating temperature: -20°C/+40°C

Installation diameter: 68mm




Installation precaution(s): Possibility of installing matt white and matt black finish bezels outdoors under shelter

Additional information: Adapts to your preferences with its range of accessories:

Numerous possibilities for finish/bezel shapes



Matt White

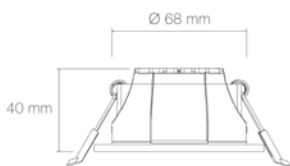

SWITCH

| W | KELVIN | LUMENS | LUMENS/W | CRI | A → G | CODE |
|---|-------------------|-------------|----------|-----|-------|-------|
| 6 | 2700K/3000K/4000K | 500/525/600 | 88 | 90 | 60° | 57016 |

ACCESSORIES

Emergency Offering - Contact Sales



LED'UP UNIVERSAL PRO

FIXED OR
ADJUSTABLE




ROUND OR
SQUARE



BAFFLED OR
WALLWASHER



9 FINISHES



NEW

TWIST & LOCK BEZELS
AND RENOVATION
COVER RING



QUICK CONNECTION
TERMINAL BLOCK

FROM 970LM
TO 1025LM



NEW

STANDARD & DALI
OPTION AVAILABLE

38° & 60°
DICHROIC
OPTICS





LED'UP UNIVERSAL PRO & PRO DALI

Power/voltage: 230VAC

Dimming type: TRIAC dimming, DALI PUSH dimming

Material: Aluminium

Lens material: Polycarbonate

Environmental resistance: White and matt black versions: salt spray tested to 750h

Quick connection: Terminal block

Operating temperature: -20°C/+40°C


Installation diameter: 68mm

Installation precaution(s): Possibility of installing matt white and matt black finish bezels outdoors under shelter

Additional information: Adapts to your preferences with its range of accessories: Numerous possibilities for finish/bezel shapes



Matt White

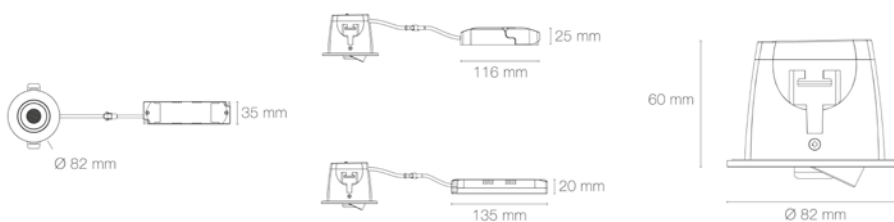

PRO

| W | KELVIN | LUMENS | LUMENS/W | CRI | Beam Angle | A → G | CODE |
|-----|-------------------------|-------------------|----------|-----|------------|-------|-------|
| 9.5 | 2700K/3000K/3500K/4000K | 980/1015/1025/970 | 108 | 90 | 38° | E | 57116 |
| | 2700K/3000K/3500K/4000K | 980/1015/1025/970 | 108 | | 60° | E | 57126 |

PRO DALI

| W | KELVIN | LUMENS | LUMENS/W | CRI | Beam Angle | A → G | CODE |
|-----|-------------|--------|----------|-----|------------|-------|-------|
| 9.5 | 2700K-6500K | 1000 | 105 | 90 | 38° | E | 57216 |
| | 2700K-6500K | 1000 | 105 | | 60° | E | 57226 |

ACCESSORIES

Emergency Offering - Contact Sales



ACCESSORIES

The LED'UP UNIVERSAL adapts to your desires thanks to its range of accessories.
Numerous possibilities for finishes and shapes to meet your preferences.

LED'UP UNIVERSAL ESTHET / ESTHET+



Interior black:
Glare rate less than 12



Interior white / aluminum / gold
/ copper:
Glare rate less than 16



FIXED VERSIONS

2 IN 1


FIXED BEZELS COMPATIBLE WITH ADJUSTABLE DOWNLIGHTS

LED'UP UNIVERSAL

| | ROUND | SQUARE |
|--|-------|--------|
| | CODE | CODE |
| | 5700 | 5720 |
| | 5703 | 5723 |
| | 5705 | 5725 |
| | 5706 | 5726 |

Round dimensions: Ø82mm

Square dimensions: 82mm x 82mm

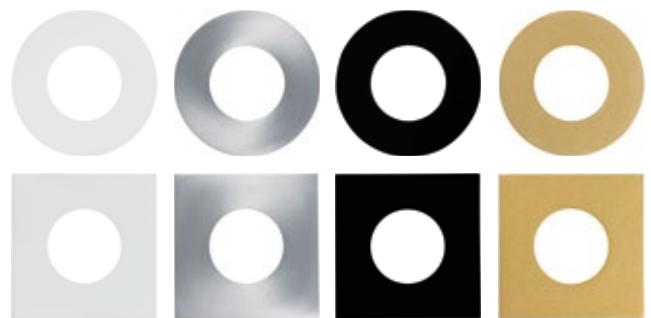

LED'UP UNIVERSAL ESTHET

| | ROUND | SQUARE |
|--|-------|--------|
| | CODE | CODE |
| | 5750 | 5760 |
| | 5753 | 5763 |
| | 5755 | 5765 |
| | 5756 | 5766 |

Round dimensions: Ø82mm x 41.20mm

Square dimensions: 82mm x 82mm x 41.20mm




LED'UP UNIVERSAL ESTHET ASYM





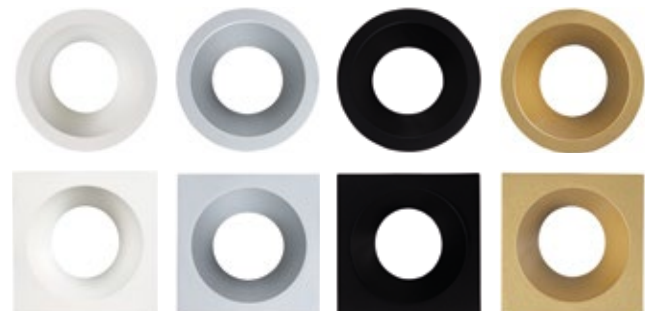

| | ROUND | SQUARE |
|--|-------|--------|
| | CODE | CODE |
| | 5770 | 5780 |
| | 5773 | 5783 |
| | 5775 | 5785 |
| | 5776 | 5786 |

Round dimensions: Ø82mm x 45.90mm

Square dimensions: 82mm x 82mm x 45.90mm



LED'UP UNIVERSAL ESTHET+






| | ROUND | SQUARE |
|---|-------|--------|
|  | CODE | CODE |
|  | 5750A | 5760A |
|  | 5750N | 5760N |
|  | 5750D | 5760D |
|  | 5755D | 5765D |
|  | 5755C | 5765C |



Round dimensions: Ø82mm x 41,20mm

Square dimensions: 82mm x 82mm x 41.20mm

LED'UP UNIVERSAL ESTHET+ ASYM

| | ROUND | SQUARE |
|---|-------|--------|
|  | CODE | CODE |
|  | 5770A | 5780A |
|  | 5770N | 5780N |
|  | 5770D | 5780D |
|  | 5775D | 5785D |








Round dimensions: Ø82mm x 45.90mm


Square dimensions: 82mm x 82mm x 45.90mm

ADJUSTABLE VERSIONS

Not compatible with the fixed LED'UP UNIVERSAL

LED'UP UNIVERSAL

| | ROUND | SQUARE |
|---|-------|--------|
|  | CODE | CODE |
|  | | 5730 |
|  | 5713 | 5733 |
|  | 5715 | 5735 |
|  | 5716 | 5736 |

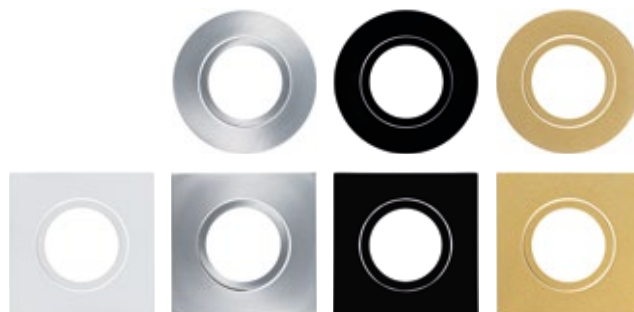

Round dimensions: Ø82mm

Square dimensions: 82mm x 82mm

✕ Adjustable Versions, you can also mix the colours!

Examples of colour mixes



Default white collar / 5713



5735 / 5733



5715 /
Default white collar



5736 / 5730



5715 / 5716

CODES FOR
BEZELS

ADJUSTABLE RENOVATION COVER RING

Compatible with all adjustable LED'UP UNIVERSAL

LED'UP UNIVERSAL

| | |
|---|------|
|  | CODE |
|  | 5799 |



Dimensions: Ø100mm

Suitable for cutouts between 80mm and 95mm



LED'UP



R6™

Power supply/voltage : 230VAC

Dimming: TRIAC dimmable

Material: Aluminium


Lens material: Polycarbonate

Quick connection: FastRFix™ connector with loop in loop out push-fit terminals

Operating temperature: -20°C/+45°C (non-insulation covered))

Recess height: 50mm low profile design for shallow ceiling voids

Additional information: Tested in 30, 60 and 90 minute solid timber joists, 30 minute i-joists and metal web joists

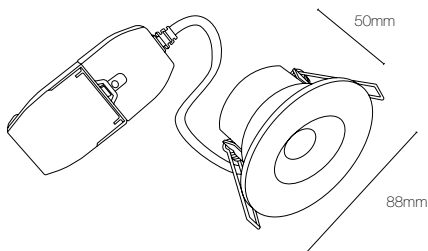

6W CRI90

| W | KELVIN | LUMENS | LUMENS/W | CRI | Beam Angle | A → G | CODE |
|---|--------|--------|----------|-----|------------|-------|-------------|
| 6 | 3000K | 580 | 97 | 90 | 60° | G | AU-R6FFH/30 |
| 6 | 4000K | 620 | 103 | 90 | 60° | G | AU-R6FFH/40 |



ACCESSORIES

FIXED POLYCARBONATE BEZEL OPTIONS

| | | |
|--|--------------------------|-----------|
| | Colour: Matt Black. | AU-R6BZMB |
| | Colour: Polished Chrome. | AU-R6BZPC |
| | Colour: Satin Nickel. | AU-R6BZSN |
| | Colour: Antique Brass. | AU-R6BZAB |

FIXED FIRE RATED ADAPTOR PLATES

| | | |
|--|------------------------------------|------------|
| | 85-145mm. Colour: White. | AU-AP600W |
| | 85-145mm. Colour: Matt White. | AU-AP600MW |
| | 85-145mm. Colour: Polished Chrome. | AU-AP600PC |
| | 85-145mm. Colour: Satin Nickel. | AU-AP600SN |

EMERGENCY PACK

| | | |
|--|----------------------------------|--------------|
| | 3 hour maintained emergency pack | AU-FRLM10EMB |
|--|----------------------------------|--------------|




R6™ CS

Power supply/voltage : 230VAC
Dimming: TRIAC dimmable
Material: Aluminium
Lens material: Polycarbonate
Quick connection: FastRFix™ connector with loop in loop out push-fit terminals
Operating temperature: -20°C/+45°C (non-insulation covered))
Recess height: 50mm low profile design for shallow ceiling voids
Additional information: Tested in 30, 60 and 90 minute solid timber joists, 30 minute i-joists and metal web joists



CRI 90
30 Min 60 Min 90 Min
3000K 4000K 5700K
IP65
40,000H
Warranty 5 YEARS

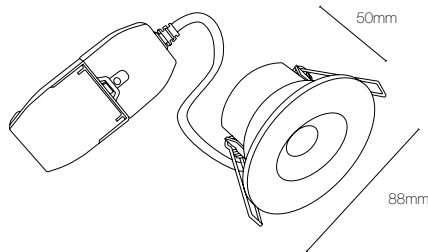

6W CRI90 COLOUR SWITCHABLE

| W | KELVIN | LUMENS | LUMENS/W | CRI | A → G | CODE |
|---|-------------------|--------|----------|-----|-------|------------|
| 6 | 3000K/4000K/5700K | 620 | 103 | 90 | 60° | AU-R6CSFFH |

70mm
Acoustic rated
Air leakage
IP65
IP65
L1 Compliant
L2 Compliant

ACCESSORIES

FIXED POLYCARBONATE BEZEL OPTIONS

| | | |
|--|--------------------------|-----------|
| | Colour: Matt Black. | AU-R6BZMB |
| | Colour: Polished Chrome. | AU-R6BZPC |
| | Colour: Satin Nickel. | AU-R6BZSN |
| | Colour: Antique Brass. | AU-R6BZAB |

FIXED FIRE RATED ADAPTOR PLATES

| | | |
|--|------------------------------------|------------|
| | 85-145mm. Colour: White. | AU-AP600W |
| | 85-145mm. Colour: Matt White. | AU-AP600MW |
| | 85-145mm. Colour: Polished Chrome. | AU-AP600PC |
| | 85-145mm. Colour: Satin Nickel. | AU-AP600SN |

EMERGENCY PACK

| | | |
|--|----------------------------------|--------------|
| | 3 hour maintained emergency pack | AU-FRLM10EMB |
|--|----------------------------------|--------------|





R6™ CWS

Power supply/voltage : 230VAC

Dimming: TRIAC dimmable

Material: Aluminium

Lens material: Polycarbonate

Quick connection: FastRFix™ connector with loop in loop out push-fit terminals

Operating temperature: -20°C/+45°C (non-insulation covered))

Recess height: 50mm low profile design for shallow ceiling voids

Additional information: Tested in 30, 60 and 90 minute solid timber joists, 30 minute i-joists and metal web joists



CRI 90

30 Min
60 Min
90 Min


3000K
4000K
5700K

4W
6W

IP65

40,000H

Warranty
5 YEARS

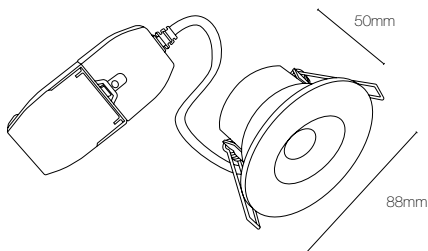

4-6W CRI90 COLOUR & WATTAGE SWITCHABLE

| W | KELVIN | LUMENS | LUMENS/W | CRI | Beam Angle | A → G | CODE |
|---|-------------------|--------|----------|-----|------------|-------|-------------|
| 4 | 3000K/4000K/5700K | 420 | 105 | 90 | 60° | A → G | AU-R6CWSFFH |
| 6 | 3000K/4000K/5700K | 620 | 103 | 90 | 60° | A → G | AU-R6CWSFFH |

70mm

Acoustic rated

Air leakage

Fire rated

L1
Compliant

L2
Compliant

ACCESSORIES

FIXED POLYCARBONATE BEZEL OPTIONS

| | | |
|--|--------------------------|-----------|
| | Colour: Matt Black. | AU-R6BZMB |
| | Colour: Polished Chrome. | AU-R6BZPC |
| | Colour: Satin Nickel. | AU-R6BZSN |
| | Colour: Antique Brass. | AU-R6BZAB |

FIXED FIRE RATED ADAPTOR PLATES

| | | |
|--|------------------------------------|------------|
| | 85-145mm. Colour: White. | AU-AP600W |
| | 85-145mm. Colour: Matt White. | AU-AP600MW |
| | 85-145mm. Colour: Polished Chrome. | AU-AP600PC |
| | 85-145mm. Colour: Satin Nickel. | AU-AP600SN |

EMERGENCY PACK

| | | |
|--|----------------------------------|--------------|
| | 3 hour maintained emergency pack | AU-FRLM10EMB |
|--|----------------------------------|--------------|




R6™ CWS

Power supply/voltage : 230VAC
Dimming: TRIAC dimmable
Material: Aluminium
Lens material: Polycarbonate
Quick connection: FastRFix™ connector with loop in loop out push-fit terminals
Operating temperature: -20°C/+45°C (non-insulation covered))
Recess height: 50mm low profile design for shallow ceiling voids
Additional information: Tested in 30, 60 and 90 minute solid timber joists, 30 minute i-joists and metal web joists



CRI 90
30 Min 60 Min 90 Min
3000K 4000K 5700K
4W 6W
IP65
40,000H
Warranty 5 YEARS

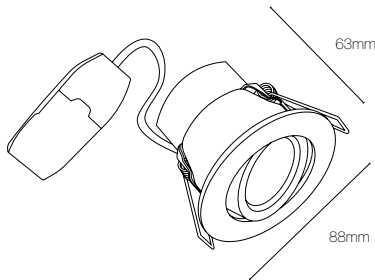

4-6W CRI90 ADJUSTABLE COLOUR & WATTAGE SWITCHABLE

| W | KELVIN | LUMENS | LUMENS/W | CRI | Beam Angle | Beam Spread | A → G | CODE |
|---|-------------------|--------|----------|-----|------------|-------------|-------|--------------|
| 4 | 3000K/4000K/5700K | 420 | 105 | 90 | 20° | 60° | A → G | AU-R62CWSFFH |
| 6 | 3000K/4000K/5700K | 620 | 103 | 90 | 20° | 60° | A → G | AU-R62CWSFFH |

ACCESSORIES

ADJUSTABLE POLYCARBONATE BEZEL OPTIONS

- Colour: Matt Black. AU-R62BZMB
- Colour: Polished Chrome. AU-R62BZPC
- Colour: Satin Nickel. AU-R62BZSN
- Colour: Antique Brass. AU-R62BZAB

EMERGENCY PACK

- 3 hour maintained emergency pack AU-FRLM10EMB

70mm
Acoustic rated
Air leakage
IP65
70mm
L1 compliant
L2 compliant





■ **CEILING & TRACK LIGHTS**

| | |
|---------------------|----|
| LED Ceiling Lights | 20 |
| GU10 Ceiling Lights | 22 |
| LED Track Lights | 24 |
| GU10 Track Lights | 26 |



ANOVI UNIVERSAL RANGE

BOXE

2 sizes
2 shapes



Available in track version

PROFILE



PENDANT



Available in track version

2 FINISHES



5 FINISHES OF DECORATIVE RINGS



Mounted with LED'UP UNIVERSAL

✗ SWITCH

UP TO 600 LUMENS

AVAILABLE IN NON-LAMPED VERSION WITH GU10 SOCKET AND QUICK CONNECTION HOOK INCLUDED

+

ICE™ LAMPS
THE PERFECT MATCH

EN-DGU005
5W Dimmable GU10
2700K, 3000K, 4000K, 6400K

LOW GLARE HONEYCOMB INCLUDED



BOXE

120MM

LED Module & GU10 versions



- ✗ Recess or surface mount under false ceiling

200MM



- ✗ Surface mount under concrete, brick, slab ceiling
- ✗ Available in track version

PROFILE

LED Module & GU10 versions



- ✗ Single Head
- ✗ Double Head
- ✗ Triple Head
- ✗ Surface mount under false ceiling/under concrete, brick, slab ceiling

PENDANT

- ✗ Surface-mounted under false ceiling/under concrete ceiling, brick, floor slab
- ✗ Available in track version



LED Versions

SWITCH

- ✗ 3 In 1
● 2700K, ● 3000K, ● 4000K

- ✗ SWITCH via colour switch on driver



Accessories

By default, the decorative ring of the anovi UNIVERSAL is Matt White or Matt Black. You can choose another finish for the decorative ring from the accessories in the range.



ANOVI UNIVERSAL BOXE LED

Material: Aluminium



Optical/diffuser/glass type: Low glare honeycomb

Lens material: Polycarbonate

Quick connection: Terminal Block

Operating temperature: -20°C/+40°C

Additional information: Adapts to your preferences with its range of accessories

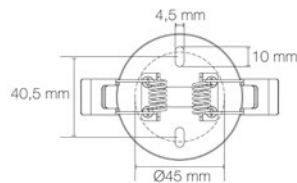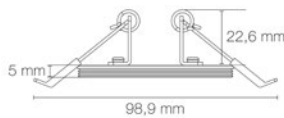

| W | KELVIN | LUMENS | LUMENS/W | CRI | SDCM | | | | A → G |
|---|-------------------|-------------|----------|-----|------|--------|-----|--------|-------|
| 6 | 2700K/3000K/4000K | 500/525/600 | 88 | 90 | 5 | 230VAC | 60° | H05S-K | F |

Mounted with LED'UP UNIVERSAL SWITCH, TRIAC variation







ALUMINIUM DECORATIVE RINGS

ROUND - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2900 |
|  | Colour: Lacquered Aluminium. | 2903 |
|  | Colour: Matt Black. | 2905 |
|  | Colour: Gold. | 2906 |
|  | Colour: Copper. | 2907 |

SQUARE - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2910 |
|  | Colour: Lacquered Aluminium. | 2913 |
|  | Colour: Matt Black. | 2915 |
|  | Colour: Gold. | 2916 |
|  | Colour: Copper. | 2917 |

| 12CM Recessed Diameter: 45mm - wired 160mm Recessed/surface mounted - installation under false ceiling | | | | 20CM 100mm projection Installation under concrete-brick-slab ceiling | | | |
|--|--------|--|--------|--|--------|--|--------|
| MATT WHITE  | | MATT BLACK  | | MATT WHITE  | | MATT BLACK  | |
| ROUND | SQUARE | ROUND | SQUARE | ROUND | SQUARE | ROUND | SQUARE |
| CODE | CODE | CODE | CODE | CODE | CODE | CODE | CODE |

29000016 29010016 29001016 29011016 29100016 29110016 29101016 29111016



ANOVI GU10 UNIVERSAL BOXE

Power/voltage: 230VAC

Maximum power of the source (not included): 6W

Socket: GU10

Material: Aluminium

Type of optics/diffuser/glass: Low glare honeycomb

Quick connection: Terminal block with pre-connected socket included

Operating temperature: -20°C/+40°C

Additional information: Adapts to your preferences with its range of accessories.


Compatible with LED GU10 lamps



+

ICE™ LAMPS
THE PERFECT MATCH

EN-DGU005
5W Dimmable GU10
2700K, 3000K,
4000K, 6400K

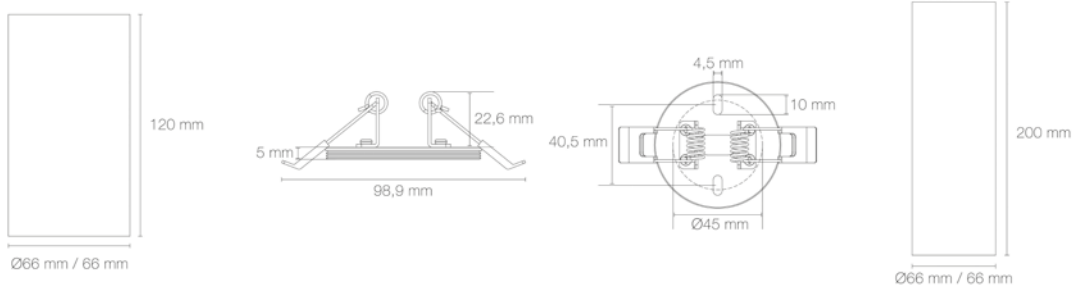

| | | | SHAPE | INSTALLATION | EMBEDDING DIAMETER | WIRING | CODE | |
|------|--|--|-------------------------------------|--|--------------------|-------------------------------|--------------|-------|
| 12cm | | | round | Recessed/Protruding Installation under false ceiling. | 45mm | Wired with a length of 160mm. | 29000 | |
| | | | Matt White <input type="checkbox"/> | | | | square | 29010 |
| | | | Matt Black <input type="checkbox"/> | | | | round | 29001 |
| | | | | | | | square | 29011 |
| 20cm | | | round | Protruding Installation under concrete, brick, slab ceiling. | | Wired with a length of 100mm. | H05S-K 29100 | |
| | | | Matt White <input type="checkbox"/> | | | | square | 29110 |
| | | | Matt Black <input type="checkbox"/> | | | | round | 29101 |
| | | | | | | | square | 29111 |



ALUMINIUM DECORATIVE RINGS

ROUND - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2900 |
|  | Colour: Lacquered Aluminium. | 2903 |
|  | Colour: Matt Black. | 2905 |
|  | Colour: Gold. | 2906 |
|  | Colour: Copper. | 2907 |

SQUARE - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2910 |
|  | Colour: Lacquered Aluminium. | 2913 |
|  | Colour: Matt Black. | 2915 |
|  | Colour: Gold. | 2916 |
|  | Colour: Copper. | 2917 |



ANOVI UNIVERSAL BOXE RAIL LED

Material: Aluminium

Type of optics/diffuser/glass: Low luminance honeycomb

Lens material: Polycarbonate


Pre-wiring: Adapter for three-circuit track

Quick connection: junction box with pre-connected socket included

Operating temperature: -20°C/+40°C

Installation precautions: Installation under false ceiling/under concrete-brick-flooring

Additional information: Adapts to your desires thanks to its range of accessories

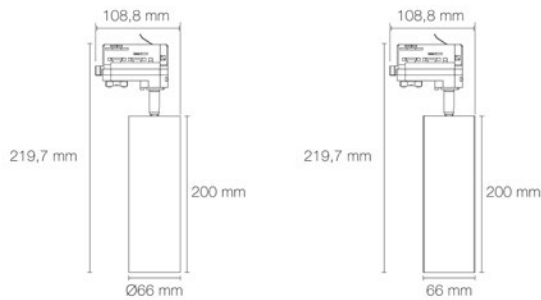

| W | KELVIN | LUMENS | LUMENS/W | CRI | SDCM | | | | A → G |
|--|-------------------|-------------|----------|-----|------|--------|-----|--------|-------|
| Fitted with LED'UP UNIVERSAL SWITCH, TRIAC dimmable. | | | | | | | | | |
| 6 | 2700K/3000K/4000K | 500/525/600 | 88 | 90 | 5 | 230VAC | 60° | H05S-K | F |





ALUMINIUM DECORATIVE RINGS

ROUND - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2900 |
|  | Colour: Lacquered Aluminium. | 2903 |
|  | Colour: Matt Black. | 2905 |
|  | Colour: Gold. | 2906 |
|  | Colour: Copper. | 2907 |

SQUARE - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2910 |
|  | Colour: Lacquered Aluminium. | 2913 |
|  | Colour: Matt Black. | 2915 |
|  | Colour: Gold. | 2916 |
|  | Colour: Copper. | 2917 |

| MATT WHITE  | | MATT BLACK  | |
|--|----------|--|----------|
| ROUND | SQUARE | ROUND | SQUARE |
| CODE | CODE | CODE | CODE |
| 29200016 | 29210016 | 29201016 | 29211016 |



ANOVI GU10 UNIVERSAL BOXE RAIL

Power/voltage: 230VAC

Maximum power of the source (not included): 6W

Socket: GU10

Material: Aluminium

Optical/diffuser/glass type: Low luminance honeycomb

Pre-wiring: Adapter for three-circuit track

Quick connection: Pre-connected socket included

Operating temperature: -20°C/+40°C

Installation precaution(s): Installation under false/concrete-brick-slab ceiling

Additional information: Adapts to your preferences with its range of accessories.


Compatible with LED GU10 lamps



+

ICE™ LAMPS
THE PERFECT MATCH

EN-DGU005
5W Dimmable GU10
2700K, 3000K,
4000K, 6400K

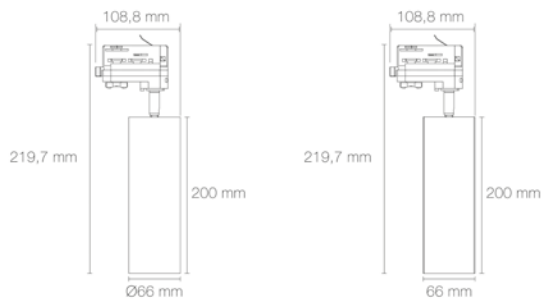

| | SHAPE | CODE |
|------------|--------|-------|
| Matt White | Round | 29200 |
| | Square | 29210 |
| Matt Black | Round | 29201 |
| | Square | 29211 |

H05S-K



ALUMINIUM DECORATIVE RINGS

ROUND - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2900 |
|  | Colour: Lacquered Aluminium. | 2903 |
|  | Colour: Matt Black. | 2905 |
|  | Colour: Gold. | 2906 |
|  | Colour: Copper. | 2907 |

SQUARE - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2910 |
|  | Colour: Lacquered Aluminium. | 2913 |
|  | Colour: Matt Black. | 2915 |
|  | Colour: Gold. | 2916 |
|  | Colour: Copper. | 2917 |





 **SURFACE LIGHTING**

| | |
|---------------------|----|
| LED Surface Lights | 30 |
| GU10 Surface Lights | 32 |



ANOVI UNIVERSAL PROFILE LED

Material: Aluminium

Optical/diffuser/glass type: Low glare honeycomb

Lens material: Polycarbonate

Quick connection: Terminal Block

Operating temperature: -20°C/+40°C


Installation precaution(s): Installation under false/concrete-brick-slab ceiling

Additional information: Adapts to your preferences with its range of accessories, offering multiple possibilities for ring finishes



Matt White

Matt Black

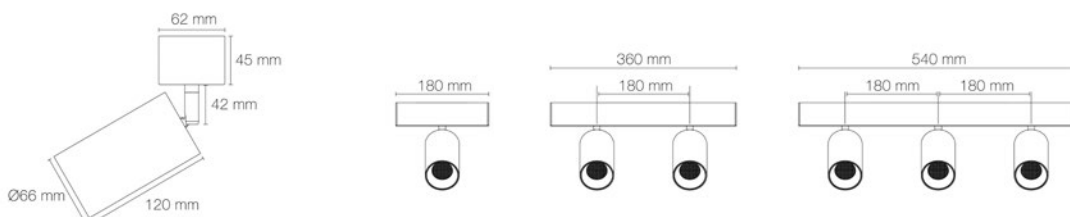







| W | KELVIN | LUMENS | LUMENS/W | CRI | SDCM | | | | A → G |
|--|-------------------|-------------|----------|-----|------|--------|-----|--------|-------|
| Fitted with LED'UP UNIVERSAL SWITCH, TRIAC dimmable. | | | | | | | | | |
| 6 | 2700K/3000K/4000K | 500/525/600 | 88 | 90 | 5 | 230VAC | 60° | H05S-K | F |



ALUMINIUM DECORATIVE RINGS

ROUND - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2900 |
|  | Colour: Lacquered Aluminium. | 2903 |
|  | Colour: Matt Black. | 2905 |
|  | Colour: Gold. | 2906 |
|  | Colour: Copper. | 2907 |

| 1 HEAD | | 2 HEADS | | 3 HEADS | |
|--|--|--|--|--|--|
| MATT WHITE  | MATT BLACK  | MATT WHITE  | MATT BLACK  | MATT WHITE  | MATT BLACK  |
| CODE | CODE | CODE | CODE | CODE | CODE |
| 29300016 | 29301016 | 29320016 | 29321016 | 29330016 | 29331016 |



ANOVI GU10 UNIVERSAL PROFILE

Power/voltage: 230VAC

Maximum power of the source (not included): 6W

Socket: GU10

Material: Aluminium

Optical/diffuser/glass type: Low glare honeycomb

Quick connection: Terminal Block with pre-connected socket included

Operating temperature: -20°C/+40°C

Installation precaution(s): Installation under false/concrete-brick-slab ceiling

Additional information: Adapts to your preferences with its range of accessories.

Compatible with LED GU10 lamps



+


ICE™ LAMPS
THE PERFECT MATCH

EN-DGU005
5W Dimmable GU10
2700K, 3000K,
4000K, 6400K



Matt White

Matt Black

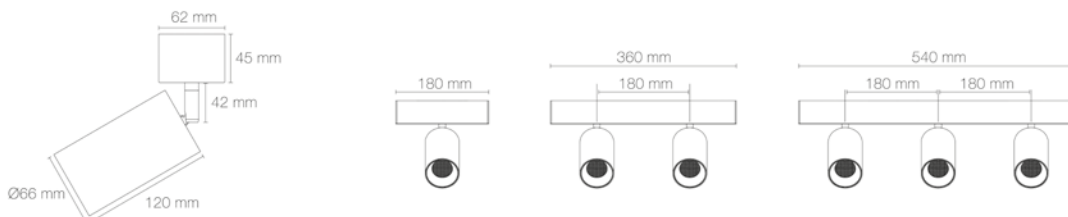

| NUMBER OF HEADS | | | CODE |
|-----------------|-------------------------------------|--------|-------|
| 1 head | | | 29300 |
| 2 head | Matt White <input type="checkbox"/> | | 29320 |
| 3 head | | | 29330 |
| 1 head | | H05S-K | 29301 |
| 2 head | Matt Black <input type="checkbox"/> | | 29321 |
| 3 head | | | 29331 |



ALUMINIUM DECORATIVE RINGS

ROUND - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2900 |
|  | Colour: Lacquered Aluminium. | 2903 |
|  | Colour: Matt Black. | 2905 |
|  | Colour: Gold. | 2906 |
|  | Colour: Copper. | 2907 |





PENDANTS & FLOORWASHERS

| | |
|-----------------------|----|
| Ceiling Pendants | 36 |
| GU10 Ceiling Pendants | 38 |
| Track Pendants | 40 |
| GU10 Track Pendants | 42 |
| Low Level Floorwasher | 44 |



ANOVI UNIVERSAL PENDANT LED



Material: Aluminium

Lens material: Polycarbonate

Optical/diffuser/glass type: Low luminance honeycomb

Pre-wiring: Wired with 1.5m cable (adjustable)

Quick connection: Terminal block

Operating temperature: -20°C/+40°C


Installation precaution(s): Installation under false/concrete-brick-slab ceiling

Additional information: Adapts to your preferences with its range of accessories




Matt White

Matt Black

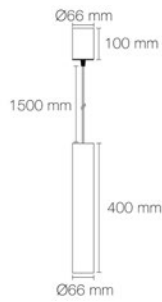

| W | KELVIN | LUMENS | LUMENS/W | CRI | SDCM | | | | A → G |
|--|-------------------|-------------|----------|-----|------|--------|-----|--------------------------------|-------|
| Fitted with LED'UP UNIVERSAL SWITCH, TRIAC dimmable. | | | | | | | | | |
| 6 | 2700K/3000K/4000K | 500/525/600 | 88 | 90 | 5 | 230VAC | 60° | H03W-F 2x0,5mm ² | F |

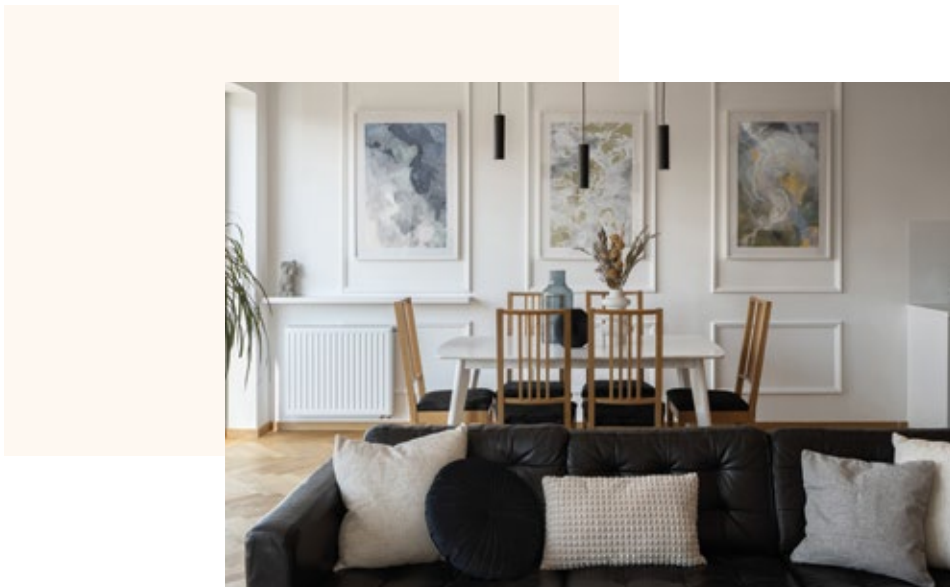

ALUMINIUM DECORATIVE RINGS

ROUND - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2900 |
|  | Colour: Lacquered Aluminium. | 2903 |
|  | Colour: Matt Black. | 2905 |
|  | Colour: Gold. | 2906 |
|  | Colour: Copper. | 2907 |

MATT WHITE 

MATT BLACK 

CODE

CODE

29400016

29401016



ANOVI GU10 UNIVERSAL PENDANT

Power/voltage: 230VAC

Maximum power of the source (not included): 6W

Socket: GU10

Material: Aluminium

Optical/diffuser/glass type: Low glare honeycomb

Pre-wiring: Wired with 1.5m cable (adjustable)

Quick connection: Terminal block with pre-connected socket included

Operating temperature: -20°C/+40°C

Installation precaution(s): Installation under false/concrete-brick-slab ceiling

Additional information: Adapts to your preferences with its range of accessories.

Compatible with LED GU10 lamps



+


ICE™ LAMPS
THE PERFECT MATCH

EN-DGU005
5W Dimmable GU10
2700K, 3000K,
4000K, 6400K



Matt White

Matt Black

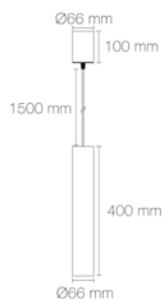

| | | CODE |
|------------|----------------------|-------|
| Matt White | H03W-F | 29400 |
| Matt Black | 2x0,5mm ² | 29401 |



ALUMINIUM DECORATIVE RINGS

ROUND - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2900 |
|  | Colour: Lacquered Aluminium. | 2903 |
|  | Colour: Matt Black. | 2905 |
|  | Colour: Gold. | 2906 |
|  | Colour: Copper. | 2907 |



ANOVI UNIVERSAL PENDANT RAIL LED



Material: Aluminium

Type of optics/diffuser/glass: Low-luminance honeycomb

Lens material: Polycarbonate

Pre-wiring: Adapter for three-circuit track/wired 1.5m (length adjustable)

Quick connection: junction box with pigtail

Operating temperature: -20°C/+40°C


Installation precautions: Installation under false ceiling/under concrete-brick-floor

Additional information: Adapts to your preferences with its range of accessories



Matt White

Matt Black

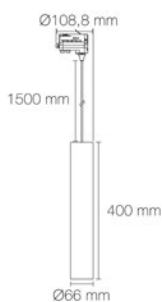

| W | KELVIN | LUMENS | LUMENS/W | CRI | SDCM | | | | A → G |
|--|-------------------|-------------|----------|-----|------|--------|-----|--------------------------------|-------|
| Mounted with LED'UP UNIVERSAL SWITCH, TRIAC variation. | | | | | | | | | |
| 6 | 2700K/3000K/4000K | 500/525/600 | 88 | 90 | 5 | 230VAC | 60° | H03W-F 2x0,5mm ² | F |



ALUMINIUM DECORATIVE RINGS

ROUND - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2900 |
|  | Colour: Lacquered Aluminium. | 2903 |
|  | Colour: Matt Black. | 2905 |
|  | Colour: Gold. | 2906 |
|  | Colour: Copper. | 2907 |

MATT WHITE 

MATT BLACK 

CODE

CODE

29440016

29441016



ANOVI GU10 UNIVERSAL PENDANT RAIL

Power/voltage: 230VAC

Maximum power of the source (not included): 6W

Socket: GU10

Material: Aluminium

Type of optics/diffuser/glass: Low luminance honeycomb

Pre-wiring: Adapter for three-circuit track/wired 1.5m (length adjustable)

Quick connection: Pre-connected socket included

Operating temperature: -20°C/+40°C

Installation precaution(s): Installation under false/concrete-brick-slab ceiling

Additional information: Adapts to your preferences with its range of accessories.


Compatible with LED GU10 lamps.




+

ICE™ LAMPS
THE PERFECT MATCH

EN-DGU005
5W Dimmable GU10
2700K, 3000K,
4000K, 6400K

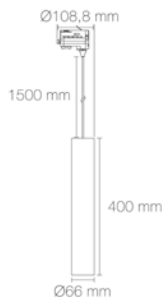

| | | CODE |
|-------------------------------------|----------------------|-------|
| Matt White <input type="checkbox"/> | H03W-F | 29440 |
| Matt Black <input type="checkbox"/> | 2x0,5mm ² | 29441 |

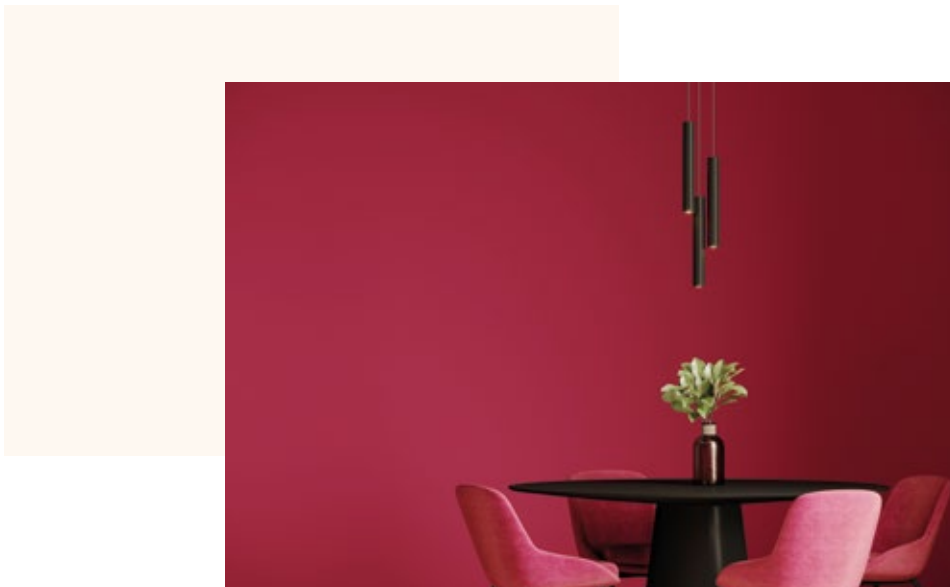

ALUMINIUM DECORATIVE RINGS

ROUND - Sold individually

| | | |
|---|------------------------------|------|
|  | Colour: Matt White. | 2900 |
|  | Colour: Lacquered Aluminium. | 2903 |
|  | Colour: Matt Black. | 2905 |
|  | Colour: Gold. | 2906 |
|  | Colour: Copper. | 2907 |



Waiz™ CS



Power supply/voltage: 230VAC

Material: Aluminium body and bezel

Surface treatment: Powder coated

Operating temperature: -10°C/+40°C

Recessed depth: Minimum 35mm


Additional information: Slim 5mm square bezel. Sold separately

Designed for use with single gang back boxes (83mm² x 35mm)

Colour temperature adjustment via switch



White Bezel
(sold separately)

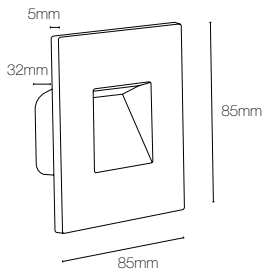

Black Bezel
(sold separately)

| W | KELVIN | LUMENS | LUMENS/W | CRI | Beam | A → G | CODE |
|---|-------------------|--------|----------|-----|------|-------|--------|
| 4 | 2700K/3000K/4000K | <175 | <44 | 80 | 80° | A → G | EN-FW1 |

ACCESSORIES

FIXED ALUMINIUM BEZEL OPTIONS

| | | |
|---|----------------|------------|
|  | Colour: White. | EN-FWB2W |
|  | Colour: Black. | EN-FWB2BLK |





 **LED STRIP**

| | |
|-----------------------------|----|
| Single Colour CRI90 Strip | 48 |
| Colour Tuneable CRI90 Strip | 51 |
| Single Colour COB | 52 |
| Colour Tuneable COB Strip | 54 |
| RGB COB Strip | 55 |



LEDline™



Power supply/voltage: 24VDC


Reel length: 30m

Operating temperature: -20°C/+45°C

Cut-point: 100mm

Installation precaution(s): 3M™ self adhesive backing, must be mounted on a clean surface. Strip must not be bent more than 60 degrees

Additional information: Connectors sold separately

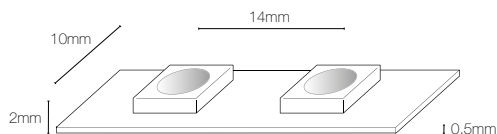

| W/M | KELVIN | LUMENS/M | LUMENS/W | LEDs/M | CRI | | A → G | CODE |
|-----|--------|----------|----------|--------|-----|------|-------|--------------|
| 9.4 | 3000K | 900 | 96 | 70 | 90 | 120° | | EN-ST902B/30 |
| | 4000K | 950 | 101 | | | | | EN-ST902B/40 |

ACCESSORIES

LED STRIP CONNECTORS

| | | |
|--|--|-----------|
| | LEDline™ Single colour strip connector. | EN-ST524A |
| | LEDline™ Single colour wired strip connector. | EN-ST524B |
| | LEDline™ Single colour inter-connection strip connector. | EN-ST524C |

LED DRIVERS

| | | | |
|--|---|---------------|--------------|
| | 16W Non-dimmable 24V constant voltage driver. | 1m per driver | AU-LED1624CV |
| | 75W Non-dimmable 24V constant voltage driver. | 5m per driver | EN-LED7524 |
| | 75W Triac dimmable 24V constant voltage driver. | 5m per driver | EN-LEDD7524 |

LEDline™

Power supply/voltage: 24VDC


Reel length: 30m

Operating temperature: -20°C/+45°C

Cut-point: 100mm

Installation precaution(s): 3M™ self adhesive backing, must be mounted on a clean surface. Strip must not be bent more than 60 degrees

Additional information: Connectors sold separately

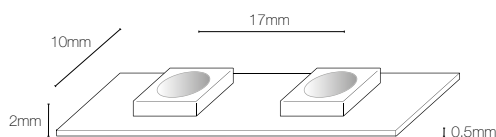

| W/M | KELVIN | LUMENS/M | LUMENS/W | LEDs/M | CRI | | A → G | CODE |
|------|--------|----------|----------|--------|-----|------|-------|--------------|
| 14.4 | 3000K | 1300 | 90 | 60 | 90 | 120° | | EN-ST903B/30 |
| | 4000K | 1400 | 97 | | | | | EN-ST903B/40 |

ACCESSORIES

LED STRIP CONNECTORS

| | | |
|--|--|-----------|
| | LEDLine™ Single colour strip connector. | EN-ST524A |
| | LEDLine™ Single colour wired strip connector. | EN-ST524B |
| | LEDLine™ Single colour inter-connection strip connector. | EN-ST524C |

LED DRIVERS

| | | | |
|--|---|---------------|--------------|
| | 16W Non-dimmable 24V constant voltage driver. | 1m per driver | AU-LED1624CV |
| | 75W Non-dimmable 24V constant voltage driver. | 5m per driver | EN-LED7524 |
| | 75W Triac dimmable 24V constant voltage driver. | 5m per driver | EN-LEDD7524 |



LEDline™



Power supply/voltage: 24VDC


Reel length: 30m

Operating temperature: -20°C/+45°C

Cut-point: 63mm

Installation precaution(s): 3M™ self adhesive backing, must be mounted on a clean surface. Strip must not be bent more than 60 degrees

Additional information: Connectors sold separately

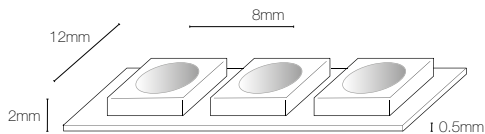

| W/M | KELVIN | LUMENS/M | LUMENS/W | LEDs/M | CRI | | A → G | CODE |
|-----|--------|----------|----------|--------|-----|------|-------|--------------|
| 22 | 3000K | 2300 | 104 | 128 | 90 | 120° | | EN-ST904B/30 |
| | 4000K | 2800 | 127 | | | | | EN-ST904B/40 |

ACCESSORIES

LED STRIP CONNECTORS

| | | |
|--|--|----------|
| | LEDline™ Single colour strip connector. | EN-ST90A |
| | LEDline™ Single colour wired strip connector. | EN-ST90B |
| | LEDline™ Single colour inter-connection strip connector. | EN-ST90C |

LED DRIVERS

| | | | |
|--|--|---------------|--------------|
| | 25W Non-dimmable 24V constant voltage driver. | 1m per driver | AU-LED2524CV |
| | 120W Non-dimmable 24V constant voltage driver. | 5m per driver | EN-LED12024 |

LEDline™ CX

Power supply/voltage: 24VDC


Reel length: 30m

Operating temperature: -20°C/+45°C

Cut-point: 100mm

Installation precaution(s): 3M™ self adhesive backing, must be mounted on a clean surface. Strip must not be bent more than 60 degrees

Additional information: Connectors sold separately

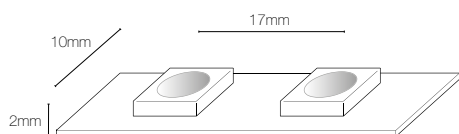

Wall controller
(white or black)
AU-CXWC1W
AU-CXWC1B



All in one driver
(75W or 150W)
AU-RGBCXWD1
AU-RGBCXWD2



Remote control
(4 zone or 1 zone)
AU-CXRC2
AU-CXRC1



All in one driver
(75W or 150W)
AU-RGBCXWD1
AU-RGBCXWD2

| W/M | KELVIN | LUMENS/M | LUMENS/W | LEDs/M | CRI | A → G | CODE |
|-----|-------------|----------|----------|--------|------|-------|------------|
| 9.6 | 2500K-6500K | 380 | 40 | 90 | 120° | | EN-ST90BCX |

Colour Tuneable

ACCESSORIES

LED STRIP CONNECTORS

| | | |
|--|---|----------|
| | LEDLine™ CX strip connector. | EN-ST93A |
| | LEDLine™ CX wired strip connector. | EN-ST93B |
| | LEDLine™ CX inter-connection strip connector. | EN-ST93C |

LED DRIVERS

| | | | |
|--|---|---------------|--------------|
| | 16W Non-dimmable 24V constant voltage driver. | 1m per driver | AU-LED1624CV |
| | 75W Non-dimmable 24V constant voltage driver. | 5m per driver | EN-LED7524 |



Premium

AURORA®

LEDline™ COB



Power supply/voltage: 24VDC

Reel length: 20m


Operating temperature: -20°C/+45°C

Cut-point: 50mm

Installation precaution(s): 3M™ self adhesive backing, must be mounted on a clean surface. Strip must not be bent more than 60 degrees

Additional information: Connectors sold separately

24V
House icon
CRI 80
III
26,500H
Warranty 3 YEARS

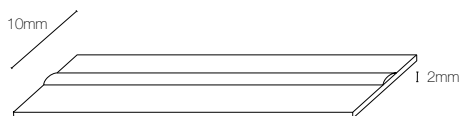

| W/M | KELVIN | LUMENS/M | LUMENS/W | LEDs/M | CRI | A → G | CODE |
|-----|--------|----------|----------|--------|------|-------|---------------|
| 12 | 2700K | 1140 | 95 | 480 | 150° | F | EN-ST10241/27 |
| | 3000K | 1200 | 100 | | | F | EN-ST10241/30 |
| | 4000K | 1260 | 105 | | | F | EN-ST10241/40 |

ACCESSORIES

LED STRIP CONNECTORS

| | | |
|--|--|------------|
| | LEDLine™ COB single colour strip connector. | EN-ST1024A |
| | LEDLine™ COB single colour wired strip connector. | EN-ST1024B |
| | LEDLine™ COB single colour inter-connection strip connector. | EN-ST1024C |

LED DRIVERS

| | | | |
|--|--|----------------|--------------|
| | 16W Non-dimmable 24V constant voltage driver. | 1m per driver | AU-LED1624CV |
| | 75W Non-dimmable 24V constant voltage driver. | 5m per driver | EN-LED7524 |
| | 120W Non-dimmable 24V constant voltage driver. | 10m per driver | EN-LED12024 |

Premium

AURORA®

LEDline™ COB - IP67

Power supply/voltage: 24VDC



Reel length: 10m

Operating temperature: -20°C/+45°C

Cut-point: 50mm

Installation precaution(s): 3M™ self adhesive backing, must be mounted on a clean surface. Strip must not be bent more than 60 degrees

Additional information: IP67 Connector kit sold separately

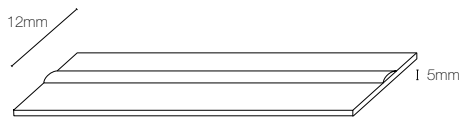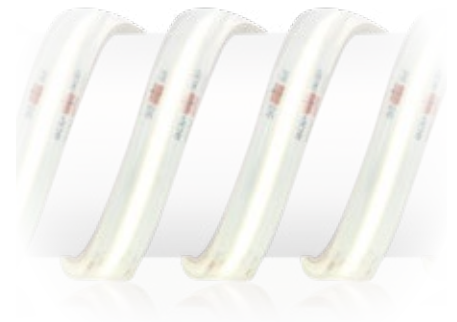

| W/M | KELVIN | LUMENS/M | LUMENS/W | LEDs/M | CRI | A → G | CODE |
|-----|--------|----------|----------|--------|------|-------|-----------------|
| 12 | 2700K | 1080 | 90 | 480 | 130° | G | EN-ST10241IP/27 |
| | 3000K | 1140 | 95 | | | F | EN-ST10241IP/30 |
| | 4000K | 1200 | 100 | | | F | EN-ST10241IP/40 |

ACCESSORIES

CONNECTOR KIT



LEDLine™ COB IP67 strip connector kit.

EN-ST10241PCK

LED DRIVERS



16W IP68 Non-dimmable 24V constant voltage driver.

1m per driver

AU-LED1624IP



60W IP67 Non-dimmable 24V constant voltage driver.

5m per driver

AU-LED6024IP



Premium

AURORA®

LEDline™ COB - CX

Power supply/voltage: 24VDC


Reel length: 20m

Operating temperature: -20°C/+45°C


Cut-point: 25mm

Installation precaution(s): 3M™ self adhesive backing, must be mounted on a clean surface. Strip must not be bent more than 60 degrees

Additional information: Connectors sold separately

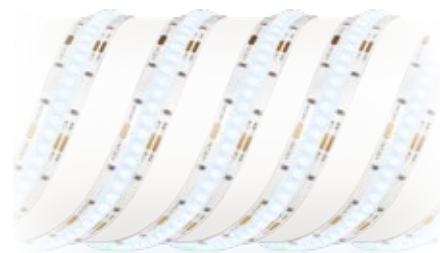

colour tuneable

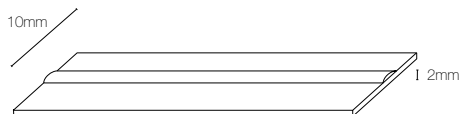

| W/M | KELVIN | LUMENS/M | LUMENS/W | LEDs/M | CRI | Beam Angle | A → G | CODE |
|-----|-------------|----------|----------|--------|-----|------------|-------|-------------|
| 16 | 2700K-6500K | 900 | 56 | 640 | 80 | 130° | F | EN-ST1024CX |

ACCESSORIES

LED STRIP CONNECTORS

| | | |
|--|---|--------------|
| | LEDline™ COB CX strip connector. | EN-ST1024CXA |
| | LEDline™ COB CX wired strip connector. | EN-ST1024CXB |
| | LEDline™ COB CX inter-connection strip connector. | EN-ST1024CXC |

LED DRIVERS

| | | | |
|--|--|----------------|--------------|
| | 16W Non-dimmable 24V constant voltage driver. | 1m per driver | AU-LED1624CV |
| | 120W Non-dimmable 24V constant voltage driver. | 10m per driver | EN-LED12024 |

LEDline™ COB - RGB

Power supply/voltage: 24VDC

Reel length: 20m

Operating temperature: -20°C/+45°C


Cut-point: 50mm

Installation precaution(s): 3M™ self adhesive backing, must be mounted on a clean surface. Strip must not be bent more than 60 degrees

Additional information: Connectors sold separately



RGB colour changing

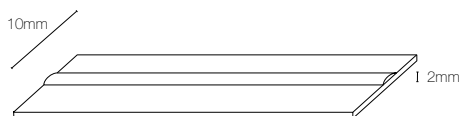

| W/M | KELVIN | LUMENS/M | LUMENS/W | LEDs/M | CRI | Beam Angle | A → G | CODE |
|-----|--------|----------|----------|--------|-----|------------|-------|--------------|
| 15 | - | | | 840 | - | 130° | - | EN-ST1024RGB |

ACCESSORIES

LED STRIP CONNECTORS


| | | |
|--|--|---------------|
| | LEDLine™ COB RGB strip connector. | EN-ST1024RGBA |
| | LEDLine™ COB RGB wired strip connector. | EN-ST1024RGBB |
| | LEDLine™ COB RGB inter-connection strip connector. | EN-ST1024RGBC |

LED DRIVERS

| | | | |
|--|---|---------------|--------------|
| | 16W Non-dimmable 24V constant voltage driver. | 1m per driver | AU-LED1624CV |
| | 75W Non-dimmable 24V constant voltage driver. | 5m per driver | EN-LED7524 |





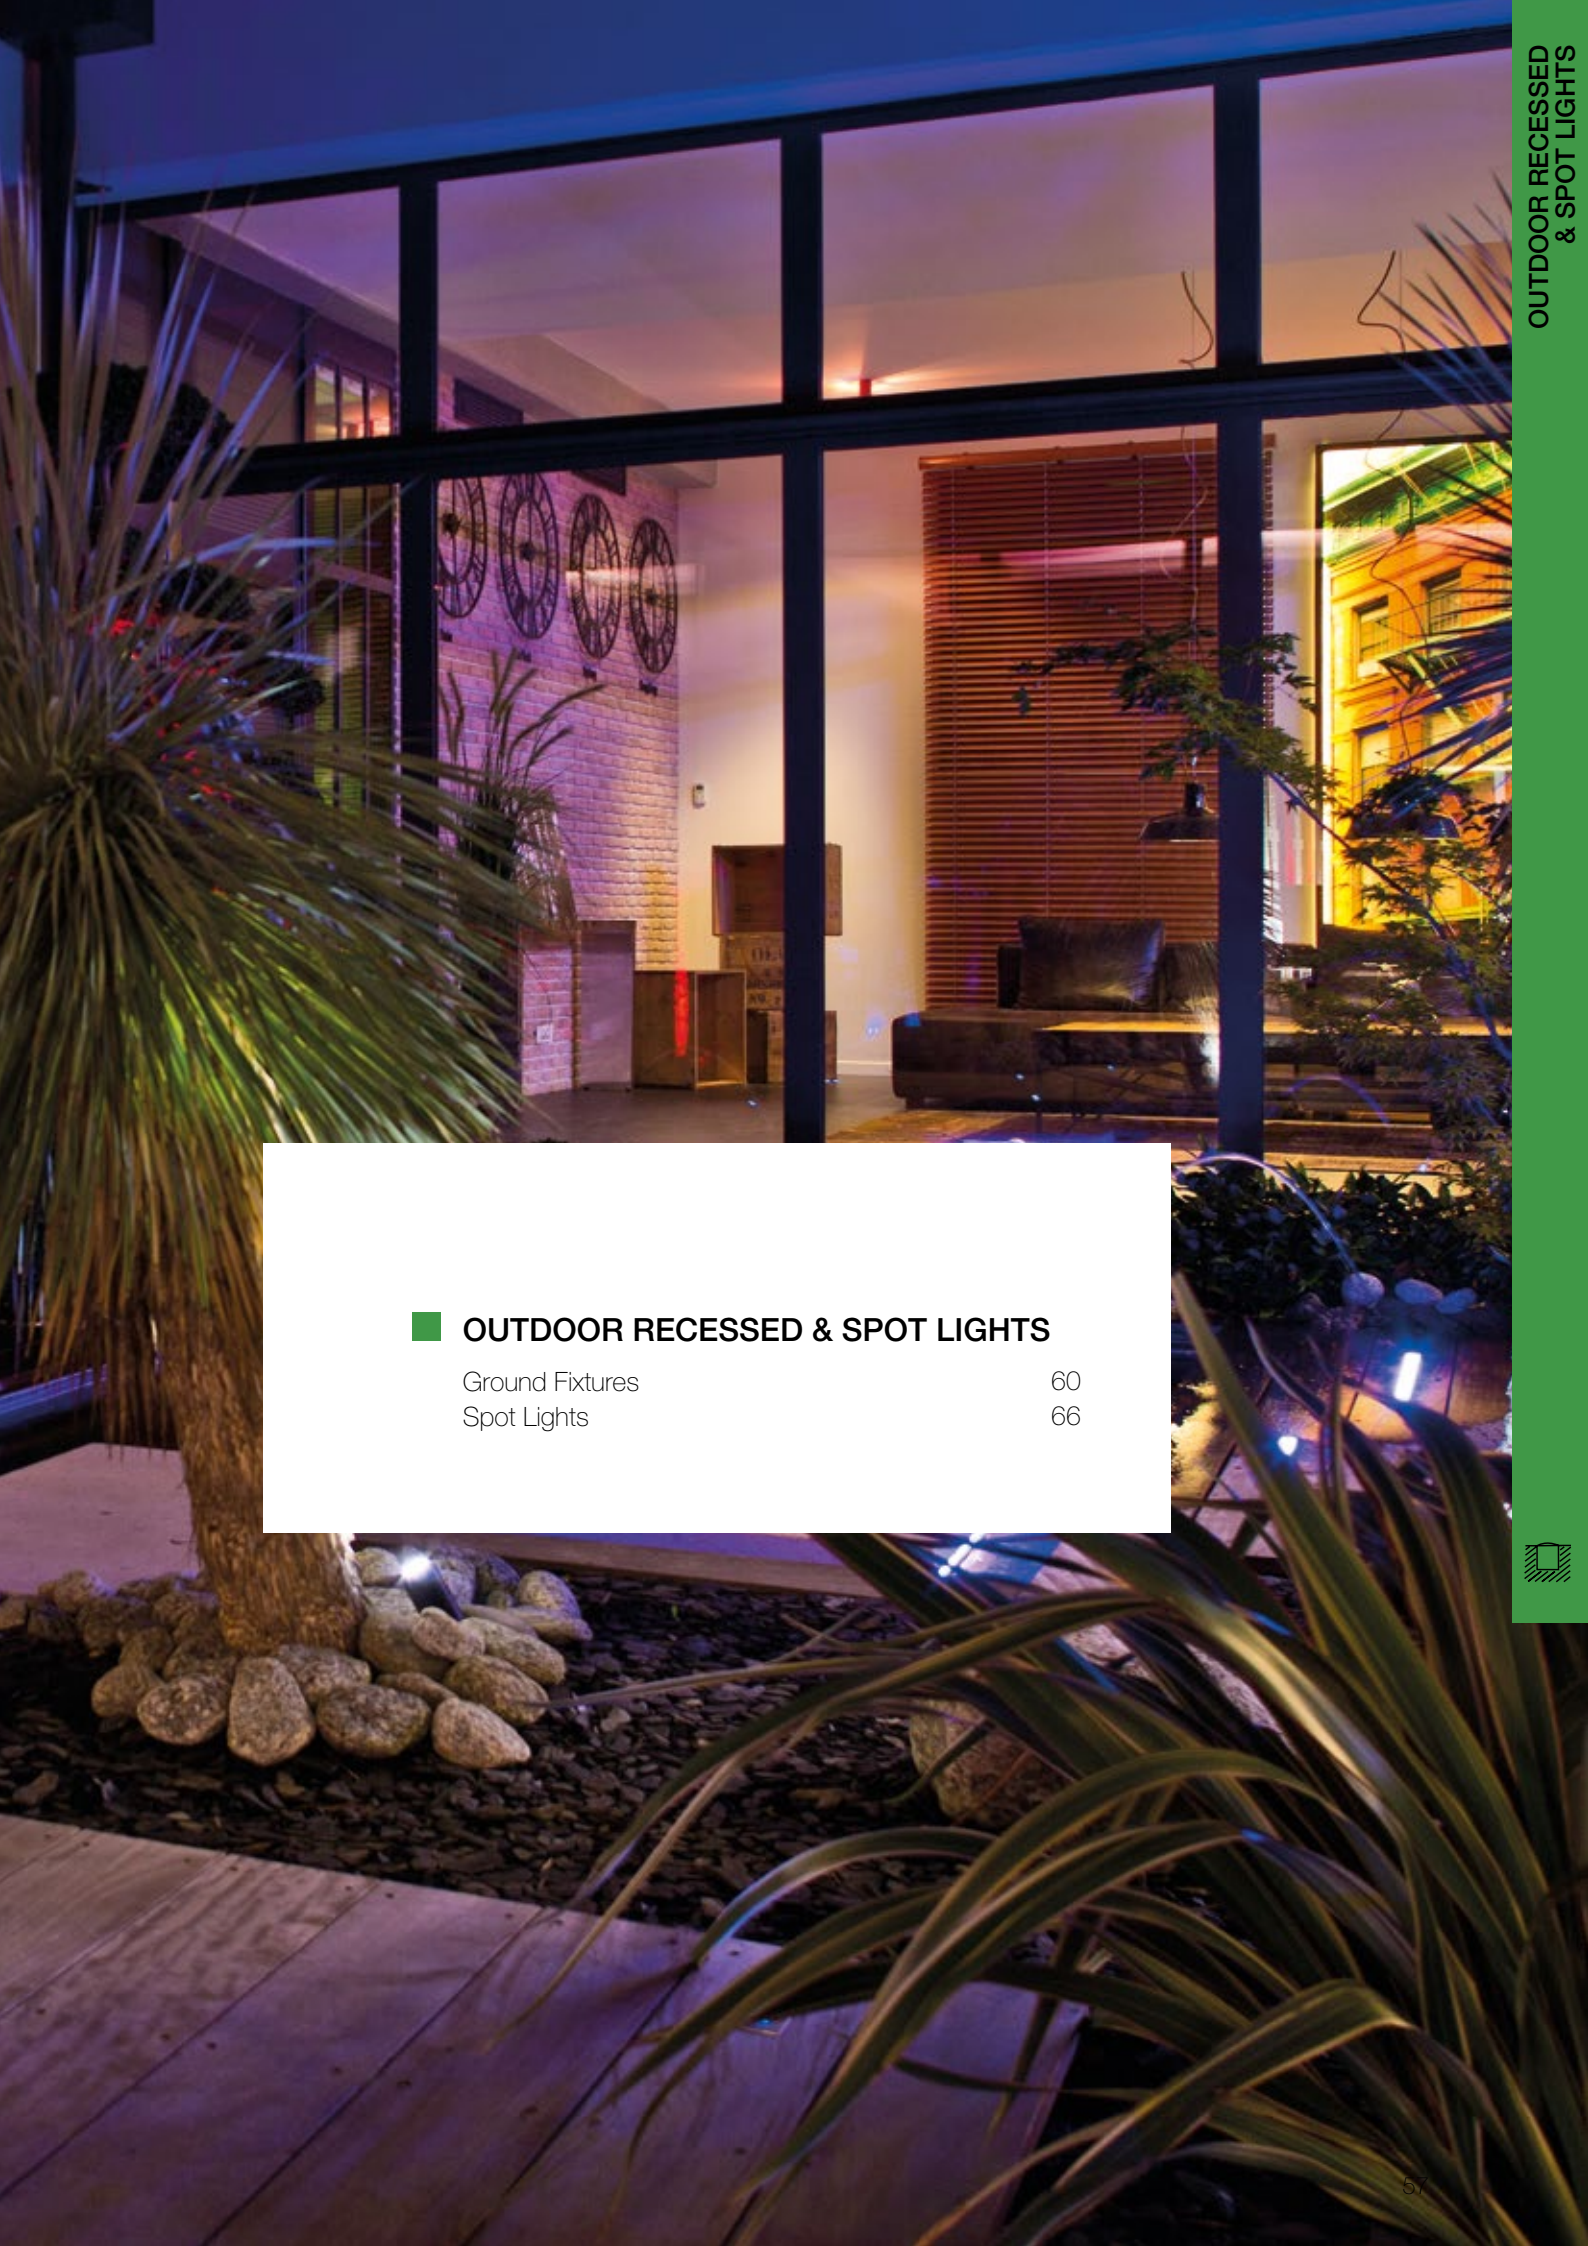

■ OUTDOOR RECESSED & SPOT LIGHTS

| | |
|-----------------|----|
| Ground Fixtures | 60 |
| Spot Lights | 66 |



Compact and discrete single colour uplights.

Colour switchable with beam angle options for varied effects.

An adjustable optic, sturdy, and comfortable thanks to its honeycomb accessory.

COLOSS 1

5W

Optics 23°

COLOSS 2 SWITCH


10W

Optics 10° - 23°

DEEP LIGHT 173

7 - 11W

Optics 30° Adjustable or Fixed

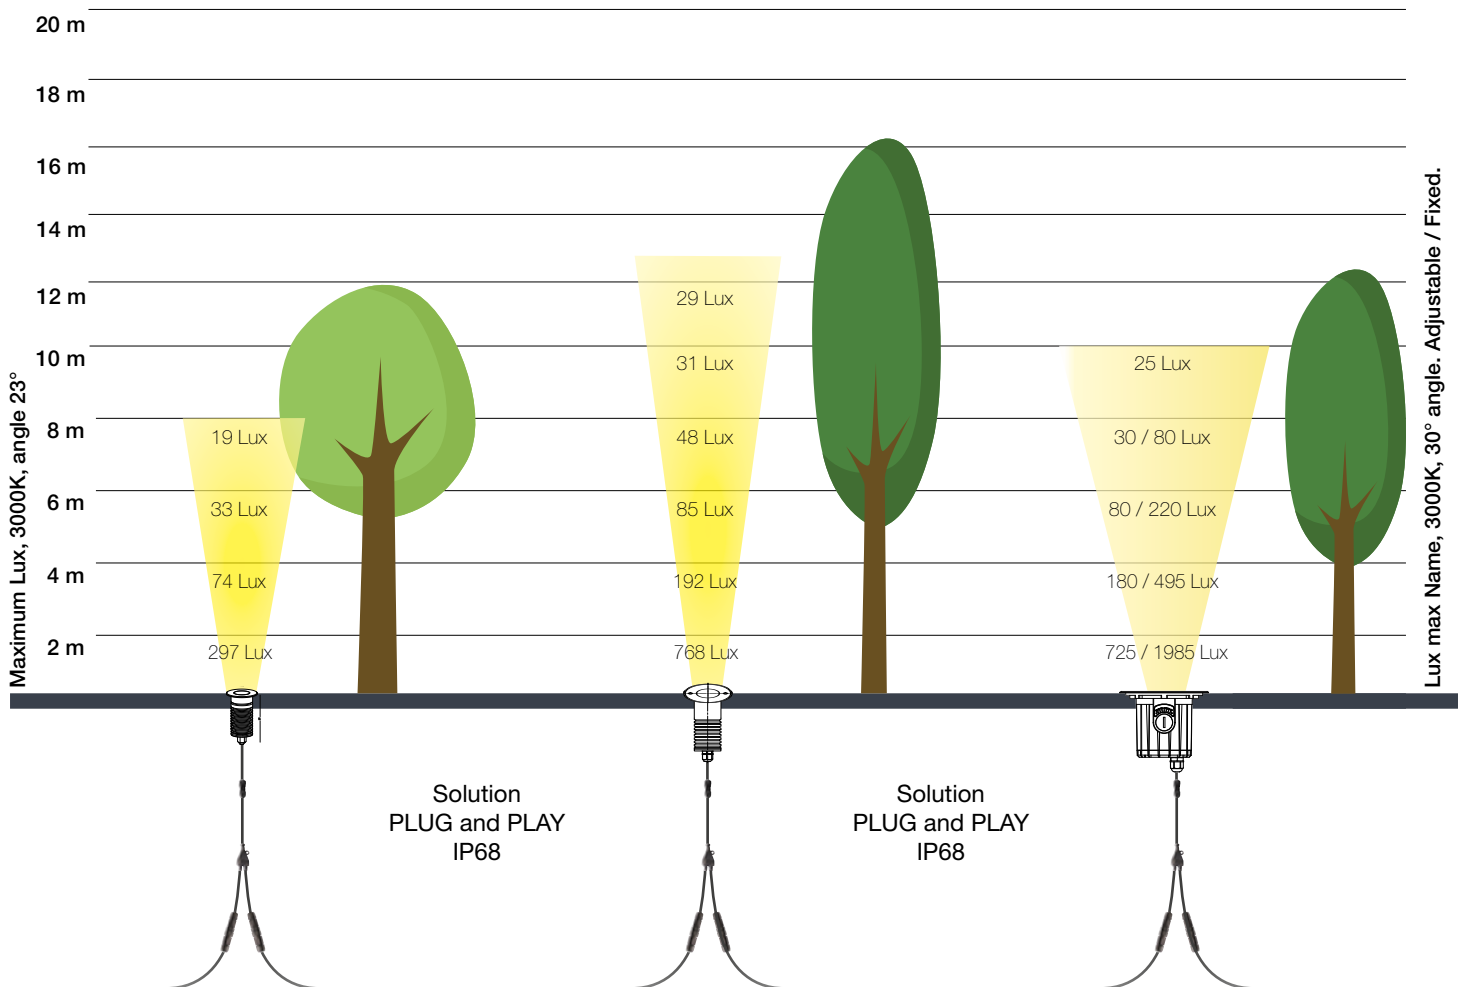

COLOSS 1
230V

Ø 60mm
350 → 430lm
5 W

- 3000K
- 4000K

COLOSS 2
SWITCH

Ø 95mm
1000 → 1140lm
10 W

- 2400K
- 3000K
- 4000K

DEEP LIGHT
173

Ø 173mm
570 → 830lm
7 → 11 W

- 3000K
- 4000K

Elegant spotlights (corrosion-resistant treatment) with a brightness of up to 460lm.

Adjustable colour temperature and resistant spotlights (corrosion-resistant treatment).

Modern and high-quality design for autonomous and energy-efficient lighting.

TUBE 1

5W

Optics
23°

TUBE 2 SWITCH

10W

Optics
10° - 23°

ELIOS SOLAR


8.5W

Optics
120°

ELIOS SOLAR

15W

Optics
120°

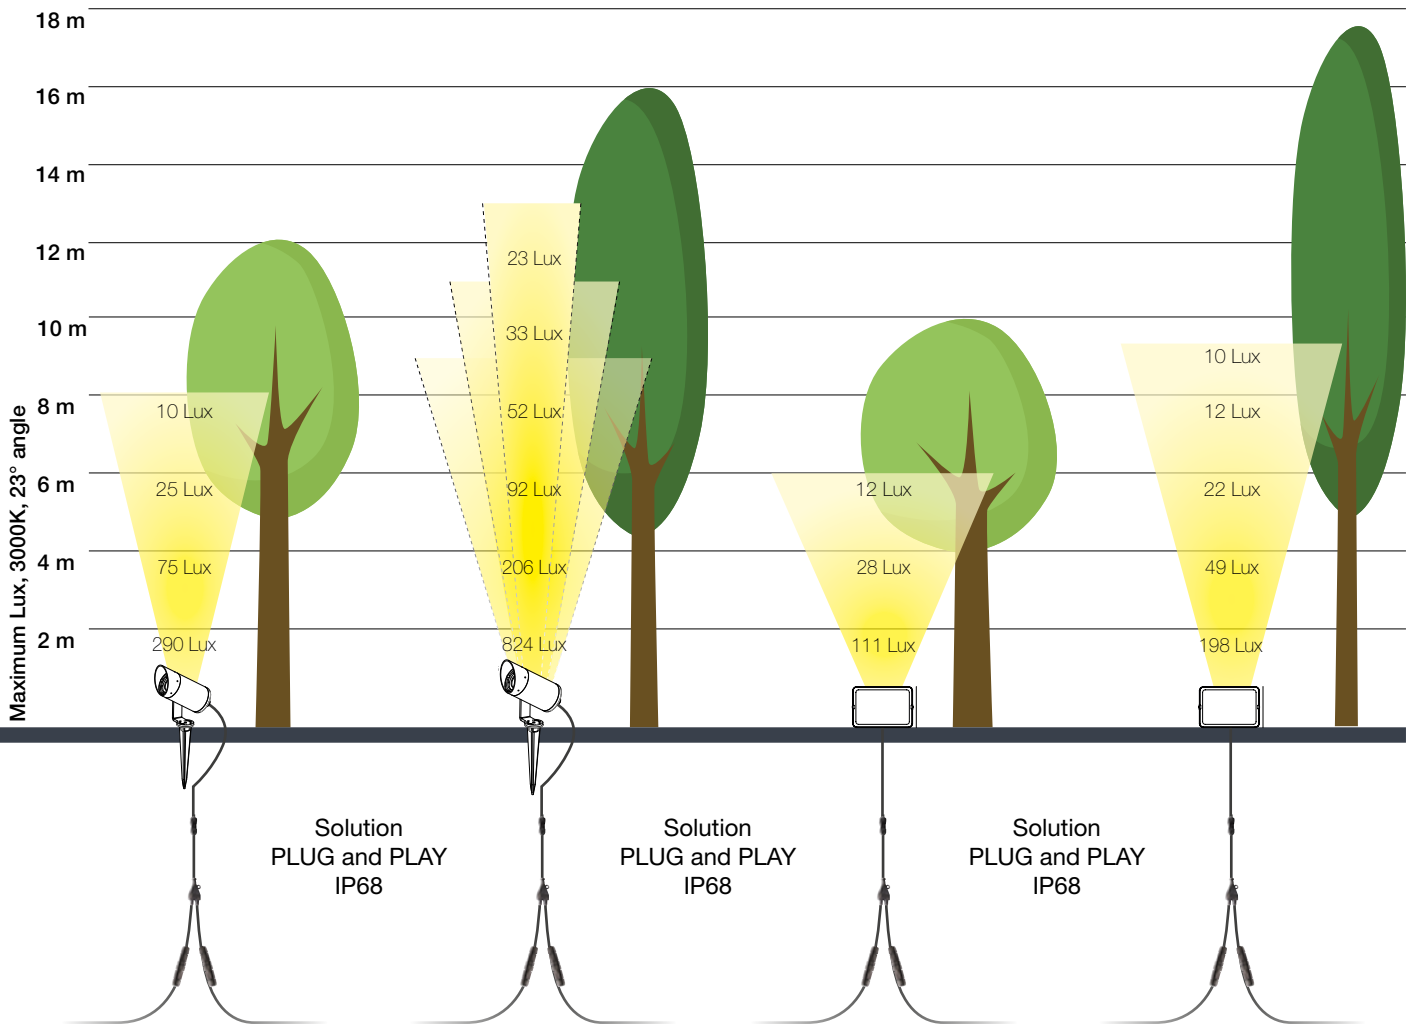

TUBE 1

440 → 460lm
5 W

- 3000K
- 4000K

TUBE 2 SWITCH

920 → 1000lm

- 2400K
- 3000K
- 4000K

ELIOS SOLAR
8.5W

1200lm

- 3000K

ELIOS SOLAR
15W

2000lm

- 3000K

COLOSS RANGE

316L STAINLESS STEEL
ROUND OR SQUARE
BEZELS AND SCREWS



LOW GLARE
OPTICS
10° - 23°




OPTIC
MARKING



HIGH LUMINOUS
EFFICIENCY UP
TO 97LM/W

PRE-WIRED QUICK
CONNECTORS
IP68 PLUG AND PLAY



COLOSS 1 - 230V

Power supply/voltage: 230VAC

Number of LEDs: 1

Material: Aluminium body/stainless steel 316L bezel

Lens material: Tempered glass


Surface treatment: Corrosion-resistant treated body

Pre-wiring: Wired for 0.5m with quick connectors IP68 Plug & Play male and female

Operating temperature: -20°C/+40°C

Recessed diameter: 52mm

Installation precaution(s): Recessed diameter specified for installation without recessing pot

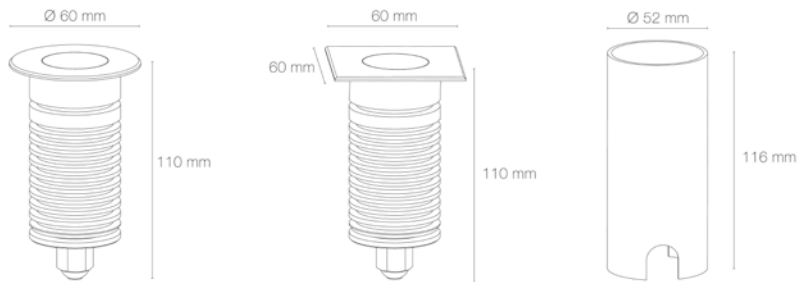

| | | | | | | | | | | ROUND | SQUARE |
|---|--------|--------|----------|-----|-----|---------|-----------------------|------|-------|-------|--------|
| W | KELVIN | LUMENS | LUMENS/W | CRI | | | A → G | CODE | CODE | | |
| LIGHTING <i>Low-glare optics</i> | | | | | | | | | | | |
| 5 | 3000K | 350 | 70 | >80 | 23° | HO5RN-F | 3x0,75mm ² | F | 53980 | 53990 | |
| | 4000K | 430 | 86 | | | | | E | 53981 | 53991 | |



COLOSS SWITCH RANGE

316L STAINLESS STEEL
ROUND OR SQUARE
BEZELS AND SCREWS



LOW GLARE
OPTICS
10° - 23°




OPTIC
MARKING



COLOUR TEMPERATURE
SWITCHABLE
VIA SWITCH
2400K/3000K/4000K



PRE-WIRED QUICK
CONNECTORS
IP68 PLUG AND PLAY



COLOSS 2 SWITCH - 230V

Power supply/voltage: 230VAC

Number of LEDs: 1

Material: Aluminium body/stainless steel 316L bezel

Lens material: Tempered glass

Surface treatment: Corrosion-resistant treated body

Pre-wiring: Wired for 0.5m with quick connectors IP68 Plug & Play male and female

Operating temperature: -20°C/+40°C





Recessed diameter: 85mm

Installation precaution(s): Recessed diameter specified for installation without recessing pot

Additional information: Colour temperature adjustment via switch



Brushed Stainless Steel

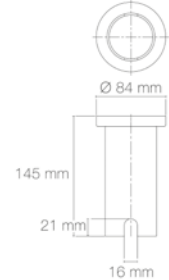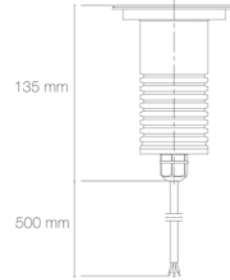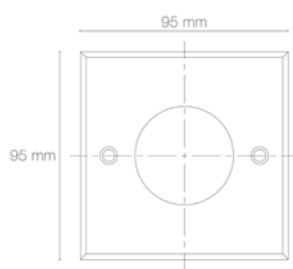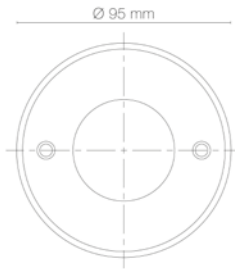

ROUND

SQUARE

| W | KELVIN | LUMENS | LUMENS/W | CRI | A → G | CODE | CODE | |
|----|-------------------|----------------|----------|-----|-------|-----------------------|-------|-------|
| 10 | 2400K/3000K/4000K | 1000/1090/1140 | 114 | >80 | 10° | HO5RN-F | 54106 | 54116 |
| | | 1000/1090/1140 | 114 | | 23° | 3x0,75mm ² | 54006 | 54016 |

LIGHTING *low-glare optics*




DEEP LIGHT RANGE

316L STAINLESS STEEL
ROUND OR SQUARE
BEZELS AND SCREWS



LOW-GLARE HONEYCOMB
OPTICS



ADJUSTABLE OPTICS +/- 20°



ULTRA RESISTANT
PAINT 1000 HOURS
SALT SPRAY
RESISTANCE

LUMINOUS
EFFICIENCY UP
TO 83LM/W


PRE-WIRED
IP68 FAST CONNECTIONS
PLUG AND PLAY





DEEP LIGHT 173 - 230V

Power supply/voltage: 230VAC
Material: Aluminium body/stainless steel 316L bezel
Lens material: Tempered glass
Surface treatment: Corrosion-resistant treated body
Environmental resistance: Paint resistant to salt spray 1000h
Pre-wiring: Wired for 0.5m with quick connectors IP68 Plug & Play male and female
Operating temperature: -20°C/+40°C
Recessed diameter: 150mm
Installation precaution(s): Recessed diameter specified for installation without recessing pot

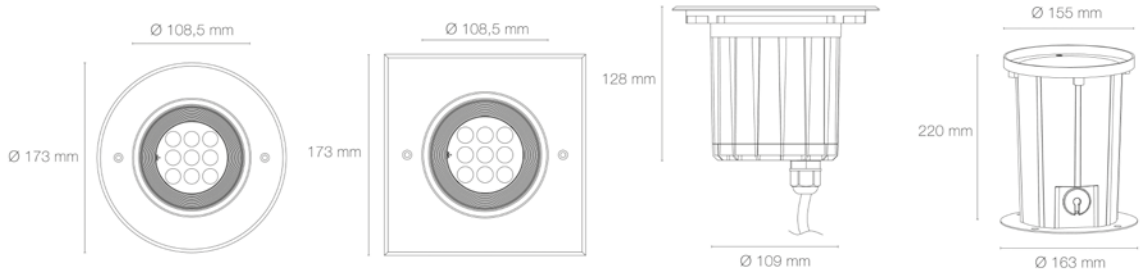

| | | SQUARE | | ROUND | | | | | |
|-------------------|--------|--------|----------|-------|-------|-------------------------------|------|-------|-------|
| W | KELVIN | LUMENS | LUMENS/W | CRI | A → G | CODE | CODE | | |
| FIXED | | | | | | | | | |
| 9 LED | | | | | | | | | |
| 9x1.2 (11) | 3000K | 790 | 73 | >80 | 30° | HO5RN-F 3x1mm ² | F | 52111 | 52101 |
| | 4000K | 830 | 77 | | | | | F | 52112 |
| ADJUSTABLE | | | | | | | | | |
| 6 LED | | | | | | | | | |
| 6x1.2 (7) | 3000K | 570 | 79 | >80 | 30° | HO5RN-F 3x1mm ² | F | 52011 | 52001 |
| | 4000K | 600 | 83 | | | | | F | 52012 |



TUBE RANGE

CAST ALUMINIUM BODY

ANTI-CORROSION
SURFACE TREATMENT

LOW GLARE
23°



PRE-WIRED QUICK
CONNECTORS IP68
PLUG AND PLAY

316L STAINLESS
STEEL SCREWS AND
BOLTS

MOUNTED ON A
SPIKE OR BASE




TUBE 1

Power supply/voltage: 230VAC
Number of LEDs: 1
Optic/diffuser/glass type: Low-glare optic
Lens material: Glass
Surface treatment: Anti-corrosion treated body and post
Operating temperature : -20°C/+40°C



CRI >80
↻
⚡
⊗
IP65
IK05
30,000H
L70 / B10 25°C
CE
Warranty 5 YEARS

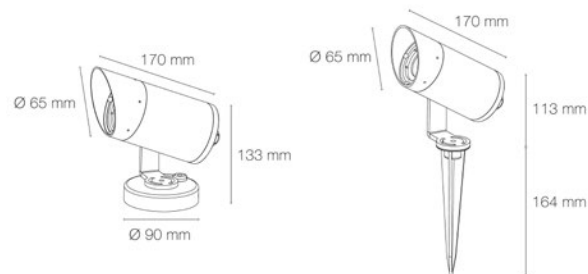

Black

| W | KELVIN | LUMENS | LUMENS/W | CRI | Beam | A → G | CODE |
|---|--------|--------|----------|-----|------|-------|------|
|---|--------|--------|----------|-----|------|-------|------|

ON BASE

Wired for 1m

Die-cast aluminium body

| | | | | | | | | |
|---|-------|-----|----|-----|-----|----------------------------------|---|-------|
| 5 | 3000K | 440 | 88 | >80 | 23° | HO5RN-F 3x0,75mm ² | E | 38300 |
| | 4000K | 460 | 92 | | | | F | 38301 |

ON SPIKE

Wired for 1m with quick connectors IP68 Plug & Play

Die-cast aluminium body and spike

| | | | | | | | | |
|---|-------|-----|----|-----|-----|----------------------------------|---|-------|
| 5 | 3000K | 440 | 88 | >80 | 23° | HO5RN-F 3x0,75mm ² | E | 38200 |
| | 4000K | 460 | 92 | | | | F | 38201 |



TUBE SWITCH RANGE

CAST ALUMINIUM BODY


ANTI-CORROSION
SURFACE TREATMENT

LOW GLARE
10° - 23°



COLOUR TEMPERATURE
SETTING VIA SWITCH
2400K/3000K/4000K

316L STAINLESS
STEEL SCREWS AND
BOLTS



MOUNTED ON A SPIKE
OR BASE

PRE-WIRED QUICK
CONNECTORS IP68
PLUG AND PLAY



TUBE 2 SWITCH

Power supply/voltage: 230VAC

Number of LEDs: 1


Optical/diffuser/glass type: Low-glare optic

Lens material: Tempered glass

Surface treatment: Body and stake treated for corrosion resistance

Operating temperature: -20°C/+40°C

Additional information: Colour temperature adjustment via switch

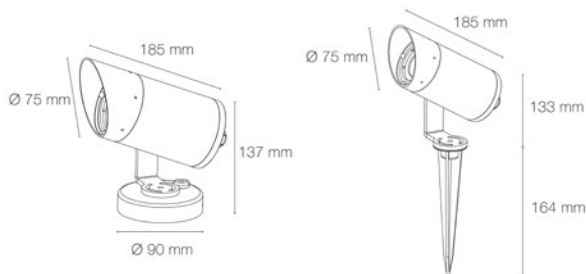

Black


| W | KELVIN | LUMENS | LUMENS/W | CRI | | A → G | CODE |
|--|-------------------|--------------|----------|-----|-----|-----------------------|-------|
| ON BASE | | | | | | | |
| <i>Wired for 1m</i> | | | | | | | |
| Die-cast aluminium body | | | | | | | |
| 10 | 2400K/3000K/4000K | 920/990/1000 | 100 | >80 | 10° | HO5RN-F | 38616 |
| | 2400K/3000K/4000K | 920/990/1000 | 100 | >80 | 23° | 3x0,75mm ² | 38316 |
| ON SPIKE | | | | | | | |
| <i>Wired for 1m with quick connectors IP68 Plug & Play</i> | | | | | | | |
| Die-cast aluminium body and spike | | | | | | | |
| 10 | 2400K/3000K/4000K | 920/990/1000 | 100 | >80 | 10° | HO5RN-F | 38416 |



TUBE GU10



Power supply/voltage: 230VAC
Maximum power of the source (not included): 6W
Socket: GU10
Optical/diffuser/glass type: Low-glare honeycomb
Material: Aluminium body/stainless steel screws/PVC spike
Lens material: Glass
Surface treatment: Corrosion-resistant treated body
Environmental resistance: Resistance to salt spray 750h
Pre-wiring: Wired for 1.5m
Installation method: On spike or base
Operating temperature: -20°C/+40°C

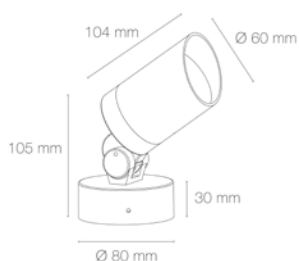

+

ICE™ LAMPS
THE PERFECT MATCH

EN-DGU005
 5W Dimmable GU10
 2700K, 3000K,
 4000K, 6400K



Matt Black

| CODE | |
|---------|-------|
| HO5RN-F | 38180 |
| 3x1mm² | |







OUTDOOR WALL & FLOODLIGHTS

| | |
|---------------------------|----|
| Recessed Wall Lights | 74 |
| Surface Mount Wall Lights | 76 |
| Solar Floodlights | 78 |
| Floodlight Accessories | 80 |



Premium

SET'IN 6.1


Power supply/voltage: 230VAC
Material: Aluminium body and bezel
Surface treatment: Anti-corrosion treatment
Pre-wiring: Wired for 0.3m
Operating temperature: -20°C/+40°C
Recessed dimensions: 71mm x 135mm



White





Black

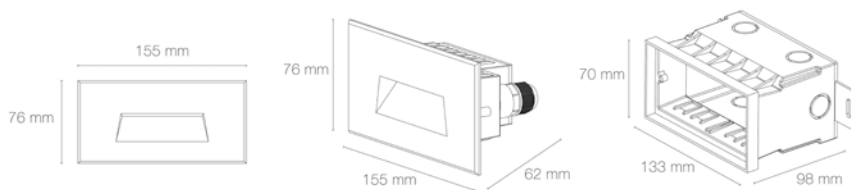

| | | | | | | | WHITE | BLACK |
|---|--------|--------|----------|-----|------|-------|-------|-------|
| W | KELVIN | LUMENS | LUMENS/W | CRI | △ | A → G | CODE | CODE |
| 2 | 3000K | 85 | 43 | >70 | 120° | | 37200 | 37210 |
| | 4000K | 92 | 46 | | | | 37201 | 37211 |

SET'IN 6.2

Power supply/voltage: 230VAC
Material: Aluminium body and bezel
Surface treatment: Anti-corrosion treatment
Pre-wiring: Wired for 0.3m
Operating temperature: -20°C/+40°C
Recessed dimensions: 71mm x 135mm

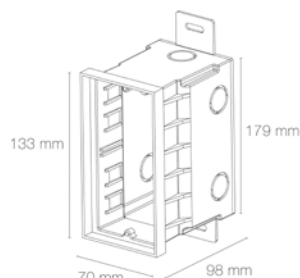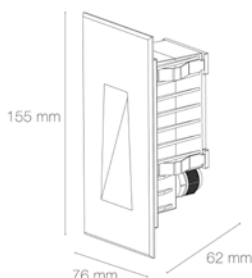

| | | | | | | | WHITE | BLACK |
|---|--------|--------|----------|-----|------|-------|-------|-------|
| W | KELVIN | LUMENS | LUMENS/W | CRI | | A → G | CODE | CODE |
| 3 | 3000K | 59 | 18 | >70 | 120° | - | 37220 | 37230 |
| | 4000K | 64 | 21 | | | | 37221 | 37231 |





WallE™ CS



Power supply/voltage: 230VAC
Type of optics/diffuser/glass: Frosted prismatic optic
Lens material: Polycarbonate
Material: Aluminium
Surface treatment: Powder coated
Operating temperature: -20°C/+45°C
Additional information: Colour temperature adjustment via switch



Side Profile

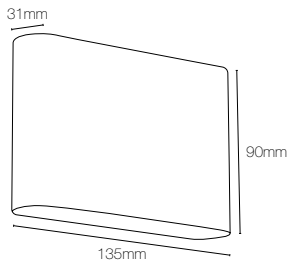

Light Effect

| W | | KELVIN | LUMENS | LUMENS/W | CRI | Beam | A → G | CODE |
|---|-------|-------------------|--------|----------|-----|------|-------|-------------|
| 6 | White | 2700K/3300K/4000K | 650 | 108 | 80 | 8° | A → G | EN-WL6CSW |
| | Black | 2700K/3300K/4000K | 650 | 108 | 80 | 8° | A → G | EN-WL6CSBLK |
| | Grey | 2700K/3300K/4000K | 650 | 108 | 80 | 8° | A → G | EN-WL6CSG |

Premium



AURORA®

Klay™

Power supply/voltage: 230VAC
Type of optics/diffuser/glass: Clear optic
Lens material: Polycarbonate
Material: Aluminium
Surface treatment: Powder coated
Operating temperature: -20°C/+45°C
Additional information: Adjustable beam angle, colour temperature adjustment via switch




Twin

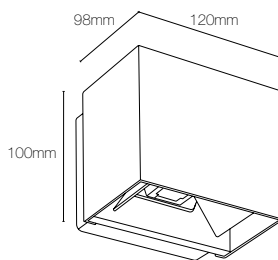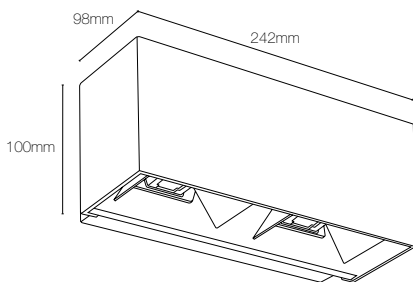

Single

| W | | KELVIN | LUMENS | LUMENS/W | CRI | | A → G | CODE | |
|----|---------|--------|--------|----------|-----|--------|-------|---------------|--------|
| 10 | Black ● | 3000K | 730 | 73 | 80 | 15-60° | | EN-WL10BLK/30 | Single |
| | | 4000K | 860 | 86 | | | | EN-WL10BLK/40 | |
| 18 | Black ● | 3000K | 1250 | 69 | 80 | 15-60° | | EN-WL18BLK/30 | Twin |
| | | 4000K | 1280 | 71 | | | | EN-WL18BLK/40 | |

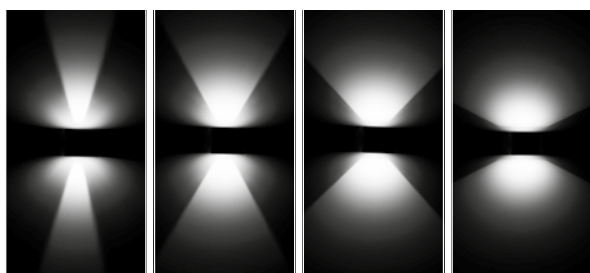


15°

30°

45°

60°

Light Effect - Single

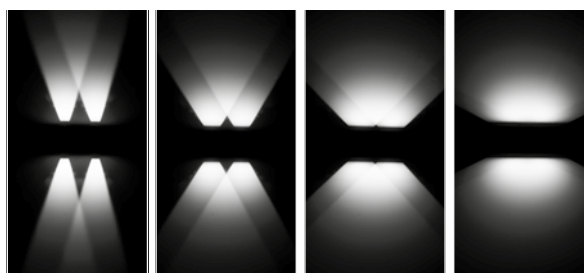

15°

30°

45°

60°

Light Effect - Twin

ELIOS SOLAR RANGE

CAST ALUMINIUM BODY



8.5W & 15W

LIGHT INTENSITY VARIATION



REMOTE CONTROL IS INCLUDED TO ADJUST LIGHT INTENSITY

SEVERAL OPERATING MODES:

- ✗ Motion detection
- ✗ Motion detection then continuous lighting at 10%
- ✗ Continuous lighting 2H or 4H
- ✗ Continuous lighting 2H or 4H then presence detection
- ✗ Continuous lighting

SOLAR PANEL:

- ✗ Adjustable
- ✗ Optional offset

REPLACEABLE LITHIUM BATTERY



INTEGRATED INFRARED TWILIGHT AND MOTION SENSORS

2.5W

SURFACE MOUNT

COMPACT FORMAT

TWO OPERATING MODES:

- ✗ Presence detection
- ✗ Presence detection then continuous lighting at 10%



ELIOS SOLAR


Power/voltage: Solar
Type of optics/diffuser/glass: Translucent optic
Material: Cast aluminium
Detection product: Yes
Type of detection: Infrared
Lens material: Tempered glass
Surface treatment: Body treated for corrosion resistance
Operating temperature: 0°C/+45°C



Anthracite Grey



Light Grey

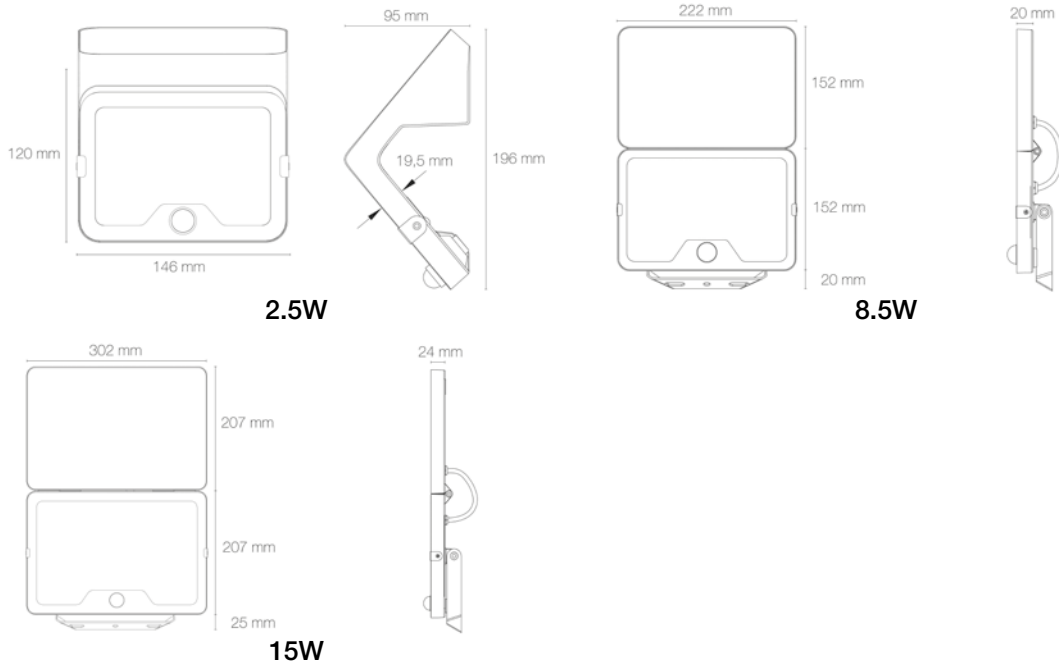

ANTHRACITE GREY LIGHT GREY

| W | KELVIN | LUMENS | LUMENS/W | CRI | A → G | CODE | CODE |
|---|--------|--------|----------|-----|-------|------|------|
|---|--------|--------|----------|-----|-------|------|------|

SURFACE-MOUNTED


Remote control: No


| | | | | | | | | |
|-----|-------|-----|-----|-----|------|---|-------|-------|
| 2.5 | 3000K | 300 | 120 | >80 | 120° | - | 67000 | 67100 |
|-----|-------|-----|-----|-----|------|---|-------|-------|

ON A REMOTE BRACKET

variation with included remote control
 Remote control: Yes




| | | | | | | | | |
|-----|-------|------|-----|-----|------|---|-------|-------|
| 8.5 | 3000K | 1200 | 140 | >80 | 120° | - | 67010 | 67110 |
| 15 | 3000K | 2000 | 140 | >80 | 120° | - | 67020 | 67120 |

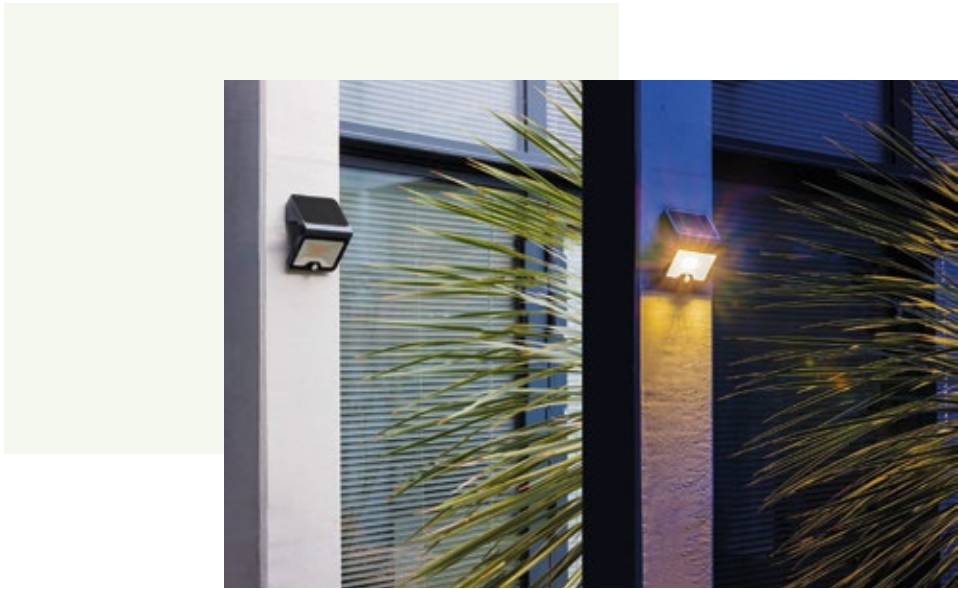



ACCESSORIES


POWER BATTERY

| | | |
|---|---|------|
|  | Sold individually. Replaceable Li-ion battery 2200mAh, 3.7VDC for ELIOS SOLAR 2.5W. | 6780 |
|  | Sold individually. Replaceable Li-ion battery 6000mAh, 3.7VDC for ELIOS SOLAR 8.5W. | 6781 |
|  | Sold individually. Replaceable Li-ion battery 12000mAh, 3.7VDC for ELIOS SOLAR 15W. | 6782 |

SOLAR PANEL REMOTE MOUNTING KIT

| | | | | |
|---|---------------------------------|-------------------------------------|--|------|
|  | Colour: Anthracite Grey, steel. | Compatible with ELIOS SOLAR 8.5W | Sold individually. | 6710 |
|  | Colour: Light Grey, steel. | | Installation involves separating the solar panel from the lighting unit, fixing the bracket, and wiring with IP68 connectors provided. | 6711 |
|  | Colour: Anthracite Grey, steel. | Compatible with ELIOS SOLAR 15W | Kit includes: 1 bracket for the solar panel, 1 4m cable, 2 IP68 connectors. | 6720 |
|  | Colour: Light Grey, steel. | | 6721 | |

ADJUSTABLE BRACKET

| | | | | |
|---|---------------------------------|-------------------------------------|--------------------|---|
|  | Colour: Anthracite Grey, steel. | Compatible with ELIOS SOLAR 8.5W | Sold individually. | 6791 |
|  | Colour: Light Grey, steel. | | | Installation involves removing the existing bracket and mounting the adjustable bracket on the projector. |
|  | Colour: Anthracite Grey, steel. | Compatible with ELIOS SOLAR 15W | | 6792 |
|  | Colour: Light Grey, steel. | | | 6802 |



Presented By

AURORA[®]

Head Office & Distribution

6 Little Burrow, Burrowfield
Welwyn Garden City
AL7 4SW
United Kingdom

Tel: 01707 228 700

Fax: 0800 8030 519



SCAN
TO VISIT

auroralighting.com

A  Galaed Group Company

AURORA[®]
LIGHTING


ELECTRA


**EURO
POLE**


HOP
lights

MIIDEX
LIGHTING